



# Series 100 Valves



# Contents

## Dorot Series 100 – General 4

### Technical Data

|                  |   |
|------------------|---|
| Available Models | 6 |
|------------------|---|

|                       |   |
|-----------------------|---|
| Design Specifications | 6 |
|-----------------------|---|

|                           |   |
|---------------------------|---|
| Diaphragm Selection Table | 7 |
|---------------------------|---|

|                        |   |
|------------------------|---|
| Dimensions and Weights | 8 |
|------------------------|---|

|                 |    |
|-----------------|----|
| Main Components | 10 |
|-----------------|----|

### Control Functions

|   |                           |    |
|---|---------------------------|----|
| M | Manually Controlled Valve | 12 |
|---|---------------------------|----|

|    |                           |    |
|----|---------------------------|----|
| EL | Solenoid Controlled Valve | 13 |
|----|---------------------------|----|

|    |                                   |    |
|----|-----------------------------------|----|
| RC | Hydraulic Remote Controlled Valve | 14 |
|----|-----------------------------------|----|

|    |                         |    |
|----|-------------------------|----|
| PR | Pressure Reducing Valve | 15 |
|----|-------------------------|----|

|    |                                    |    |
|----|------------------------------------|----|
| PS | Pressure Sustaining & Relief Valve | 16 |
|----|------------------------------------|----|

|    |                                        |    |
|----|----------------------------------------|----|
| DI | Pressure Differential Sustaining Valve | 17 |
|----|----------------------------------------|----|

|    |                    |    |
|----|--------------------|----|
| FR | Flow Control Valve | 18 |
|----|--------------------|----|

|    |                               |    |
|----|-------------------------------|----|
| FE | Excessive Flow Shut-off Valve | 19 |
|----|-------------------------------|----|

|                               |                                           |           |
|-------------------------------|-------------------------------------------|-----------|
| FL                            | Modulating Float Controlled Valve         | 20        |
| FLEL                          | Electric Float Controlled Valve           | 21        |
| FLDI                          | Differential Float Controlled Valve       | 22        |
| AL                            | Altitude Pilot Controlled Valve           | 23        |
| BC                            | Booster Pump Control Valve                | 24        |
| DW                            | Deep Well (Borehole) Pump Control Valve   | 25        |
| RE                            | Surge Anticipating Valve                  | 26        |
| QR                            | Quick Pressure-relief Valve               | 27        |
| TO                            | Two Stage Opening Addition                | 28        |
| SP                            | Surge Preventing Stepped-Closure Addition | 29        |
| EC                            | PLC Controlled Valve                      | 30        |
| DE                            | Deluge Dry-pipe and Pre-action Valves     | 31        |
| <b>Pilots and Accessories</b> |                                           | <b>32</b> |
| <b>Other Dorot Products</b>   |                                           | <b>34</b> |
| <b>Typical Applications</b>   |                                           | <b>35</b> |

#### Dorot Series 100

The direct sealing diaphragm valves were introduced to the world market for the first time by DOROT CONTROL VALVES at 1982. This valve is operated by the pressure of the pipeline and is used for various control applications in water supply, fire fighting, industrial, sewage and irrigation systems.

The only moving component is a reinforced diaphragm, which:

- a. Drip tight seals the liquid passage in the closed valve
- b. Allows free passage in the fully open valve with minimal obstruction to the flow line
- c. Throttles the flow passage in the modulating valve, as dictated by the pressure in the control chamber

The valve can be closed or modulated using the line pressure or an external separate pressure source that is equal or higher than the line pressure.

Dorot S-100 valves are made for easy, inline maintenance, executed also by unskilled personal using basic tools.

There are no shafts, bearings or seals that may corrode and there is no wear and tear by dirty abrasive water or chemicals.

#### Features and benefits

- Structural simplicity
- Superb design featuring exceptionally low pressure losses at high flow rates
- Can be used for regulating from no-flow to maximal flow with no need for additional throttling devices or by-pass valves
- For natural liquids, sea water and industrial effluents
- A wide selection of materials, coating and diaphragm types
- All valve models fit a wide variety of control applications using Dorot pilot valves




## Principle of operation

### 3-way control system

The main valve is controlled by a manually, electrically or pressure actuated selector that:

- 1 Introduces the upstream pressure or an external pressure source to the valve's control chamber, thus pressing the valve diaphragm from top to a closed position.
- 2 Opens the valve by relieving the pressure from the control chamber and enabling the internal pressure in the line to push the valve diaphragm up and creating an unrestricted, full flow passage.
- 3 Shuts all passages to and from the control chamber, thus keeping the main valve in a fixed position. This position does not exist in devices used for ON/OFF control applications but is necessary in modulating valves.

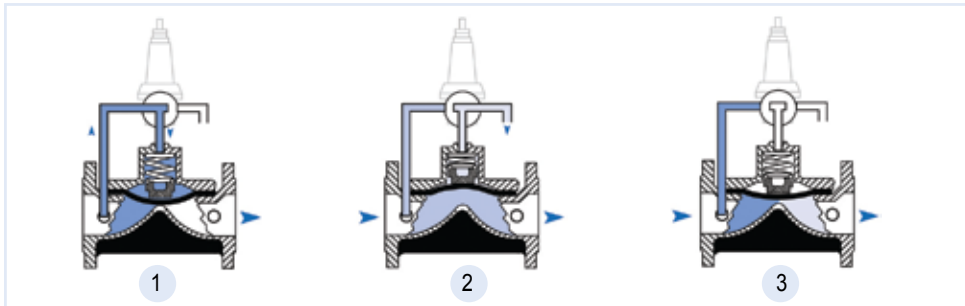


### 2-way control system

A control system that consist of two restrictions:

- a. A fixed restriction at the upstream side of the control system (nozzle or needle valve)
- b. ON/OFF device (valve, relay or solenoid) or a modulating pilot valve with a larger passage than restriction 'a' that is installed at the downstream side of the control system. The main valve position is affected by the downstream pilot valve 'b' in the following ways:

- 1 When the pilot valve is closed, no water can be vented to the downstream and the main valve is closed by the upstream pressure, introduced into the valve control chamber through the restriction 'a'.
- 2 Opening the valve is enabled when the pilot 'b' is fully open and allows the drainage of pressure in the control chamber to the downstream. At this position the pressure in the control chamber nearly equals that of the downstream.
- 3 Throttling pilot valve 'b' so the flow running through it equals the flow entering through the restriction 'a', keeps a fixed volume of water in the control chamber and the main valve in a fixed position.

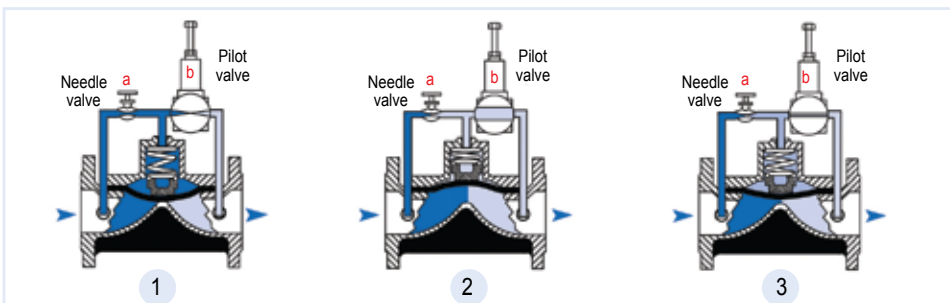

## Available Models

| Pattern         |  |  |  |  |  |  |  |  |  |  |  |  |
|-----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Type            | 44                                                                                | 45                                                                                | 53                                                                                | 47                                                                                | 87                                                                                | 77                                                                                | 82                                                                                | 84                                                                                 | 53A                                                                                 | 91                                                                                  | 67                                                                                  | 94                                                                                  |
| Connection      | Threaded                                                                          | Threaded                                                                          | Victaulic®                                                                        | Flanged                                                                           | Flanged                                                                           | Flanged                                                                           | Flanged                                                                           | Threaded                                                                           | Victaulic®                                                                          | Threaded                                                                            | Flanged                                                                             | Threaded                                                                            |
| Material        | Cast Iron                                                                         | Bronze                                                                            | Cast Iron                                                                         | Cast Iron                                                                         | Bronze                                                                            | Ductile Iron                                                                      | Cast Iron                                                                         | Cast Iron                                                                          | Cast Iron                                                                           | Bronze                                                                              | Ductile Iron                                                                        | Ductile Iron                                                                        |
| Max. Pressure   | 16bar / 230psi                                                                    |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     | 25bar / 360psi                                                                      |                                                                                     |
| Available Sizes | mm                                                                                | inch                                                                              |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|                 | 20                                                                                | 3/4                                                                               | •                                                                                 | •                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|                 | 25                                                                                | 1                                                                                 | •                                                                                 | •                                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|                 | 40                                                                                | 1 1/2                                                                             | •                                                                                 | •                                                                                 | •                                                                                 |                                                                                   |                                                                                   | •                                                                                  |                                                                                     | •                                                                                   |                                                                                     |                                                                                     |
|                 | 50                                                                                | 2                                                                                 | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                  |                                                                                     | •                                                                                   | •                                                                                   | •                                                                                   |
|                 | 65                                                                                | 2 1/2                                                                             | •                                                                                 | •                                                                                 |                                                                                   |                                                                                   | •                                                                                 |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|                 | 80                                                                                | 3                                                                                 | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                  |                                                                                     | •                                                                                   |                                                                                     |                                                                                     |
|                 | 80                                                                                | 3                                                                                 | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                  | •                                                                                   |                                                                                     | •                                                                                   |                                                                                     |
|                 | 100                                                                               | 4                                                                                 |                                                                                   |                                                                                   | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                  | •                                                                                   |                                                                                     | •                                                                                   |                                                                                     |
|                 | 150                                                                               | 6                                                                                 |                                                                                   |                                                                                   | •                                                                                 | •                                                                                 | •                                                                                 | •                                                                                  |                                                                                     |                                                                                     | •                                                                                   |                                                                                     |
|                 | 200                                                                               | 8                                                                                 |                                                                                   |                                                                                   | •                                                                                 | •                                                                                 | •                                                                                 |                                                                                    |                                                                                     |                                                                                     | •                                                                                   |                                                                                     |
|                 | 250                                                                               | 10                                                                                |                                                                                   |                                                                                   | •                                                                                 | •                                                                                 | •                                                                                 |                                                                                    |                                                                                     |                                                                                     | •                                                                                   |                                                                                     |
|                 | 300                                                                               | 12                                                                                |                                                                                   |                                                                                   | •                                                                                 | •                                                                                 | •                                                                                 |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|                 | 350                                                                               | 14                                                                                |                                                                                   |                                                                                   | •                                                                                 | •                                                                                 | •                                                                                 |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|                 | 400                                                                               | 16                                                                                |                                                                                   |                                                                                   |                                                                                   |                                                                                   | •                                                                                 |                                                                                    |                                                                                     |                                                                                     | •                                                                                   |                                                                                     |
|                 | 450                                                                               | 18                                                                                |                                                                                   |                                                                                   |                                                                                   |                                                                                   | •                                                                                 |                                                                                    |                                                                                     |                                                                                     | •                                                                                   |                                                                                     |
|                 | 500                                                                               | 20                                                                                |                                                                                   |                                                                                   |                                                                                   |                                                                                   | •                                                                                 |                                                                                    |                                                                                     |                                                                                     | •                                                                                   |                                                                                     |
|                 | 600                                                                               | 24                                                                                |                                                                                   |                                                                                   |                                                                                   |                                                                                   | •                                                                                 |                                                                                    |                                                                                     |                                                                                     | •                                                                                   |                                                                                     |


## Design Specifications

| Materials       | Standard                        | Optional *                  |
|-----------------|---------------------------------|-----------------------------|
| Body and Bonnet | Cast Iron, Ductile Iron, Bronze | Cast Steel, Stainless Steel |
| Diaphragm       | Natural Rubber                  | NBR ,EPDM ,Neoprene         |
| Spring          | SST 302                         | SST 316                     |
| Nuts And Bolts  | Coated Steel                    | SST                         |
| Coating         | Polyester                       | Epoxy, Nylon, Rubber        |


\* Others Upon Request

| Connections   | Standard             | Optional *                   |
|---------------|----------------------|------------------------------|
| Flanges       | ISO 2084, 2441, 5752 | ANSI B16<br>JIS B22<br>AS 10 |
| Threads       | F-BSP                | F-NPT                        |
| Control Bores | 1/8", 1/4", 1/2" NPT |                              |

## Non Standard Bonnets

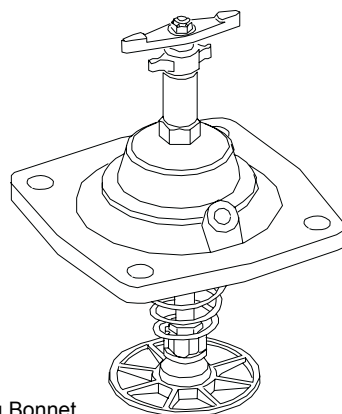

Throttling Bonnet

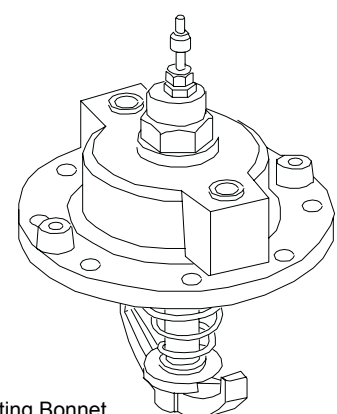

Position Indicating Bonnet

## Diaphragm Selection Table\*

| Diameter                      |                               | Type            | No. | Pressure Range |        |
|-------------------------------|-------------------------------|-----------------|-----|----------------|--------|
| mm                            | inch                          |                 |     | mwc            | psi    |
| 20, 25                        | 3/4", 1"                      | Standard        | 18  | 12-160         | 17-230 |
|                               |                               | Low Pressure    | 85  | 5-100          | 7-140  |
| 40                            | 1 1/2"                        | Standard        | 13  | 12-160         | 17-230 |
|                               |                               | S. Low Pressure | 82  | 5-50           | 7-70   |
| 50, 65                        | 2", 2 1/2", 323               | Standard        | 03  | 15-160         | 21-230 |
|                               |                               | Low Pressure    | 02  | 7-100          | 10-140 |
|                               |                               | S. Low Pressure | 12  | 4-50           | 6-70   |
|                               |                               | Extreme         | 60  | 20-160         | 28-230 |
| 50HP                          | 2"HP                          | High Pressure   | 69  | 10-250         | 15-360 |
| 80, 100                       | 3", 4"                        | Standard        | 32  | 12-160         | 17-230 |
|                               |                               | Low Pressure    | 05  | 4-100          | 6-140  |
|                               |                               | Extreme         | 61  | 20-160         | 28-230 |
| 80HP                          | 3"HP                          | High Pressure   | 70  | 10-250         | 15-360 |
| 100HP                         | 4"HP                          | High Pressure   | 71  | 10-250         | 15-360 |
| 150                           | 6", 868                       | Standard        | 62  | 20-160         | 28-230 |
|                               |                               | Low Pressure    | 09  | 5-100          | 7-140  |
|                               |                               | S. Low Pressure | 91  | 2-60           | 3-85   |
| 150HP                         | 6"HP                          | High Pressure   | 72  | 10-250         | 15-360 |
| 200, 300, 350                 | 8", 12", 14"                  | Standard        | 36  | 7-160          | 10-230 |
|                               |                               | Low Pressure    | 37  | 2-100          | 3-140  |
|                               |                               | Extreme         | 63  | 20-160         | 28-230 |
| 200HP                         | 8"HP                          | High Pressure   | 73  | 10-250         | 15-360 |
| 250                           | 10"                           | Standard        | 40  | 7-160          | 10-230 |
|                               |                               | Low Pressure    | 50  | 2-100          | 3-140  |
| 250HP, 400HP,<br>500HP, 600HP | 10"HP, 16"HP,<br>20"HP, 24"HP | High Pressure   | 78  | 10-250         | 15-360 |
|                               |                               | Low Pressure    | 92  | 2-100          | 3-140  |

\* Standard Diaphragm: Nylon Reinforced Natural Rubber. Optional Materials: Nitrile, EPDM, Neoprene Available Upon Request.

\*\* HP = High Pressure

## Pressure Rating

**Pressure rating of series 100 valves is body strength, connection standard and diaphragm type.**

Pressure rating of valve body of standard models: 16 Bar / 230 psi.

Pressure rating of valve body of high pressure models: 25 Bar / 360 psi.

Connection standard is marked on the identification plate, assembled on the valve body.

Diaphragms operation pressure range is presented at the above table.

# Series 100 Valves


## Technical Data

### Dimensions and Weights

#### Straight Flow, Threaded Connection


| Valve Size |       | L         |                                  |        |                                  | H         |                                 |        |                                 | D  |                                 | W   |                                 | Weight    |     |        |     |
|------------|-------|-----------|----------------------------------|--------|----------------------------------|-----------|---------------------------------|--------|---------------------------------|----|---------------------------------|-----|---------------------------------|-----------|-----|--------|-----|
|            |       | Cast Iron |                                  | Bronze |                                  | Cast Iron |                                 | Bronze |                                 |    |                                 |     |                                 | Cast Iron |     | Bronze |     |
| mm         | inch  | mm        | inch                             | mm     | inch                             | mm        | inch                            | mm     | inch                            | mm | inch                            | mm  | inch                            | kg        | lbs | kg     | lbs |
| 20         | 3/4   | 115       | 4 <sup>17</sup> / <sub>32</sub>  | 112    | 4 <sup>13</sup> / <sub>32</sub>  | 43        | 1 <sup>11</sup> / <sub>16</sub> | 43     | 1 <sup>11</sup> / <sub>16</sub> | 20 | 25/ <sub>32</sub>               | 68  | 2 <sup>43</sup> / <sub>64</sub> | 1         | 2.2 | 1      | 2.2 |
| 25         | 1     | 120       | 4 <sup>23</sup> / <sub>32</sub>  | 119    | 4 <sup>11</sup> / <sub>16</sub>  | 52        | 2 <sup>3</sup> / <sub>64</sub>  | 52     | 2 <sup>3</sup> / <sub>64</sub>  | 24 | 15/ <sub>16</sub>               | 68  | 2 <sup>43</sup> / <sub>64</sub> | 1         | 2.2 | 1      | 2.2 |
| 40         | 1 1/2 | 170       | 6 <sup>11</sup> / <sub>16</sub>  | 149    | 5 <sup>55</sup> / <sub>64</sub>  | 93        | 3 <sup>21</sup> / <sub>32</sub> | 86     | 3 <sup>3</sup> / <sub>8</sub>   | 33 | 1 <sup>19</sup> / <sub>64</sub> | 93  | 3 <sup>21</sup> / <sub>32</sub> | 2.2       | 4.9 | 1.8    | 4   |
| 50         | 2     | 188       | 7 <sup>13</sup> / <sub>32</sub>  | 184    | 7 <sup>15</sup> / <sub>64</sub>  | 115       | 4 <sup>17</sup> / <sub>32</sub> | 101    | 3 <sup>31</sup> / <sub>32</sub> | 42 | 1 <sup>41</sup> / <sub>64</sub> | 112 | 4 <sup>13</sup> / <sub>32</sub> | 3.2       | 7   | 2.6    | 5.7 |
| 65         | 2 1/2 | 219       | 8 <sup>5</sup> / <sub>8</sub>    | 212    | 8 <sup>11</sup> / <sub>32</sub>  | 118       | 4 <sup>41</sup> / <sub>64</sub> | 109    | 4 <sup>9</sup> / <sub>32</sub>  | 46 | 1 <sup>13</sup> / <sub>16</sub> | 112 | 4 <sup>13</sup> / <sub>32</sub> | 3.6       | 7.9 | 3.4    | 7.5 |
| 80LF *     | 323   | 225       | 8 <sup>55</sup> / <sub>64</sub>  | 221    | 8 <sup>11</sup> / <sub>32</sub>  | 126       | 4 <sup>61</sup> / <sub>64</sub> | 116    | 4 <sup>9</sup> / <sub>16</sub>  | 54 | 2 <sup>1</sup> / <sub>8</sub>   | 112 | 4 <sup>13</sup> / <sub>32</sub> | 4.5       | 9.9 | 3.9    | 8.5 |
| 80         | 3     | 316       | 12 <sup>13</sup> / <sub>64</sub> | 316    | 12 <sup>13</sup> / <sub>64</sub> | 135       | 5 <sup>5</sup> / <sub>16</sub>  | 135    | 5 <sup>5</sup> / <sub>16</sub>  | 53 | 2 <sup>5</sup> / <sub>64</sub>  | 200 | 7 <sup>7</sup> / <sub>8</sub>   | 11        | 24  |        |     |

\* LF = Low Flow

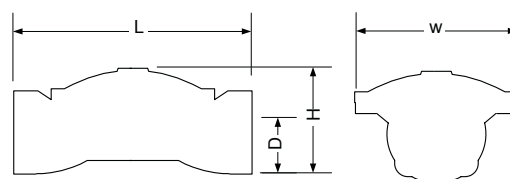

#### Straight Flow, Grooved Connection (Vic.)

| Valve Size |       | L   |                                  | H   |                                 | D  |                                 | W   |                                  | Weight |      |
|------------|-------|-----|----------------------------------|-----|---------------------------------|----|---------------------------------|-----|----------------------------------|--------|------|
| mm         | inch  | mm  | inch                             | mm  | inch                            | mm | inch                            | mm  | inch                             | kg     | lbs  |
| 40         | 1 1/2 | 177 | 6 <sup>31</sup> / <sub>32</sub>  | 81  | 3 <sup>3</sup> / <sub>16</sub>  | 26 | 1 <sup>1</sup> / <sub>64</sub>  | 93  | 3 <sup>21</sup> / <sub>32</sub>  | 1.8    | 4    |
| 50         | 2     | 190 | 7 <sup>31</sup> / <sub>64</sub>  | 100 | 3 <sup>15</sup> / <sub>16</sub> | 33 | 1 <sup>19</sup> / <sub>64</sub> | 112 | 4 <sup>13</sup> / <sub>32</sub>  | 2.6    | 5.7  |
| 80         | 323   | 201 | 7 <sup>29</sup> / <sub>32</sub>  | 120 | 4 <sup>23</sup> / <sub>32</sub> | 47 | 1 <sup>27</sup> / <sub>64</sub> | 112 | 4 <sup>13</sup> / <sub>32</sub>  | 3      | 6.6  |
| 80LF       | 3     | 286 | 11 <sup>1</sup> / <sub>4</sub>   | 124 | 4 <sup>7</sup> / <sub>8</sub>   | 47 | 1 <sup>27</sup> / <sub>64</sub> | 200 | 7 <sup>7</sup> / <sub>8</sub>    | 11     | 24.3 |
| 100        | 4     | 317 | 12 <sup>15</sup> / <sub>32</sub> | 133 | 5 <sup>15</sup> / <sub>64</sub> | 60 | 2 <sup>23</sup> / <sub>64</sub> | 194 | 7 <sup>41</sup> / <sub>64</sub>  | 12     | 26.4 |
| 150        | 6     | 392 | 15 <sup>27</sup> / <sub>64</sub> | 250 | 9 <sup>27</sup> / <sub>32</sub> | 82 | 3 <sup>7</sup> / <sub>32</sub>  | 300 | 11 <sup>13</sup> / <sub>16</sub> | 31     | 68.3 |

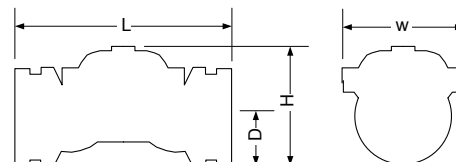


#### Angle Flow, Grooved Connection (Vic.)

| Valve Size |      | H   |                                 | D   |                                 | W   |                               | Weight |      |
|------------|------|-----|---------------------------------|-----|---------------------------------|-----|-------------------------------|--------|------|
| mm         | inch | mm  | inch                            | mm  | inch                            | mm  | inch                          | kg     | lbs  |
| 80         | 3    | 240 | 9 <sup>7</sup> / <sub>16</sub>  | 170 | 6 <sup>11</sup> / <sub>16</sub> | 200 | 7 <sup>7</sup> / <sub>8</sub> | 10.5   | 23.1 |
| 100        | 4    | 250 | 9 <sup>27</sup> / <sub>32</sub> | 185 | 7 <sup>9</sup> / <sub>32</sub>  | 200 | 7 <sup>7</sup> / <sub>8</sub> | 11.5   | 25.4 |


#### Angle Flow, Threaded Connection

| Valve Size |       | H   |                                 | D   |                                 | W   |                                 | Weight |      |
|------------|-------|-----|---------------------------------|-----|---------------------------------|-----|---------------------------------|--------|------|
| mm         | inch  | mm  | inch                            | mm  | inch                            | mm  | inch                            | kg     | lbs  |
| 40         | 1 1/2 | 110 | 4 <sup>21</sup> / <sub>64</sub> | 75  | 2 <sup>61</sup> / <sub>64</sub> | 93  | 3 <sup>21</sup> / <sub>32</sub> | 1.7    | 3.7  |
| 50         | 2     | 136 | 5 <sup>11</sup> / <sub>32</sub> | 90  | 3 <sup>35</sup> / <sub>64</sub> | 112 | 4 <sup>13</sup> / <sub>32</sub> | 2.4    | 5.3  |
| 80LF       | 323   | 165 | 6 <sup>1</sup> / <sub>2</sub>   | 114 | 4 <sup>31</sup> / <sub>64</sub> | 112 | 4 <sup>13</sup> / <sub>32</sub> | 3.6    | 7.9  |
| 80         | 3     | 239 | 9 <sup>13</sup> / <sub>32</sub> | 145 | 5 <sup>45</sup> / <sub>64</sub> | 200 | 7 <sup>7</sup> / <sub>8</sub>   | 10.8   | 23.8 |

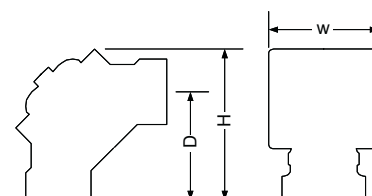

#### Angle Flow, Flanged Connection





| Valve Size |      | H   |                                  | D   |                                 | W   |                                  | Weight |      |
|------------|------|-----|----------------------------------|-----|---------------------------------|-----|----------------------------------|--------|------|
| mm         | inch | mm  | inch                             | mm  | inch                            | mm  | inch                             | kg     | lbs  |
| 80         | 3    | 278 | 9 <sup>15</sup> / <sub>16</sub>  | 174 | 8 <sup>27</sup> / <sub>32</sub> | 200 | 7 <sup>7</sup> / <sub>8</sub>    | 18     | 39.7 |
| 100        | 4    | 300 | 11 <sup>13</sup> / <sub>16</sub> | 185 | 7 <sup>9</sup> / <sub>32</sub>  | 230 | 9 <sup>3</sup> / <sub>64</sub>   | 21     | 46.3 |
| 150        | 6    | 380 | 14 <sup>61</sup> / <sub>64</sub> | 230 | 9 <sup>3</sup> / <sub>64</sub>  | 300 | 11 <sup>13</sup> / <sub>16</sub> | 45     | 99.2 |

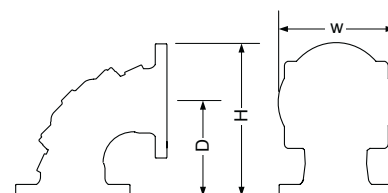

## Dimensions and Weights

### Straight Flow, Flanged Connection – Standard Models 16 Bar / 230 psi





| Valve Size |      | L   |                                  | H   |                                  | D   |                                 | W   |                                  | Weight    |      |            |      |        |      |
|------------|------|-----|----------------------------------|-----|----------------------------------|-----|---------------------------------|-----|----------------------------------|-----------|------|------------|------|--------|------|
|            |      |     |                                  |     |                                  |     |                                 |     |                                  | Cast Iron |      | Duct. Iron |      | Bronze |      |
| mm         | inch | mm  | inch                             | mm  | inch                             | mm  | inch                            | mm  | inch                             | kg        | lbs  | kg         | lbs  | kg     | lbs  |
| 50         | 2    | 200 | 7 <sup>7</sup> / <sub>8</sub>    | 166 | 6 <sup>17</sup> / <sub>32</sub>  | 85  | 3 <sup>11</sup> / <sub>32</sub> | 166 | 6 <sup>17</sup> / <sub>32</sub>  | 7.2       | 15.8 | 7.7        | 17   | 8      | 17.6 |
| 80LF       | 323  | 200 | 7 <sup>7</sup> / <sub>8</sub>    | 202 | 7 <sup>61</sup> / <sub>64</sub>  | 105 | 4 <sup>1</sup> / <sub>8</sub>   | 200 | 7 <sup>7</sup> / <sub>8</sub>    | 11        | 24.3 | 11.8       | 26   |        |      |
| 80         | 3    | 285 | 11 <sup>7</sup> / <sub>32</sub>  | 200 | 7 <sup>7</sup> / <sub>8</sub>    | 105 | 4 <sup>1</sup> / <sub>8</sub>   | 200 | 7 <sup>7</sup> / <sub>8</sub>    | 17        | 37.5 | 18.2       | 40.1 | 19     | 42   |
| 100        | 4    | 305 | 12                               | 230 | 9 <sup>3</sup> / <sub>64</sub>   | 110 | 4 <sup>21</sup> / <sub>64</sub> | 230 | 9 <sup>3</sup> / <sub>64</sub>   | 22        | 48.5 | 24         | 53   | 24     | 53   |
| 150        | 6    | 390 | 15 <sup>11</sup> / <sub>32</sub> | 314 | 12 <sup>23</sup> / <sub>64</sub> | 145 | 5 <sup>45</sup> / <sub>64</sub> | 300 | 11 <sup>13</sup> / <sub>16</sub> | 46        | 101  | 49         | 108  | 51     | 112  |
| 200LF      | 868  | 385 | 15 <sup>11</sup> / <sub>32</sub> | 350 | 13 <sup>25</sup> / <sub>32</sub> | 170 | 6 <sup>11</sup> / <sub>16</sub> | 365 | 14 <sup>3</sup> / <sub>8</sub>   | 50        | 110  | 54         | 119  |        |      |
| 200        | 8    | 460 | 18 <sup>7</sup> / <sub>64</sub>  | 400 | 15 <sup>3</sup> / <sub>4</sub>   | 170 | 6 <sup>11</sup> / <sub>16</sub> | 365 | 14 <sup>3</sup> / <sub>8</sub>   | 80        | 176  | 86         | 190  | 89     | 196  |
| 250        | 10   | 535 | 21 <sup>1</sup> / <sub>16</sub>  | 445 | 17 <sup>13</sup> / <sub>64</sub> | 205 | 8 <sup>1</sup> / <sub>16</sub>  | 440 | 17 <sup>9</sup> / <sub>16</sub>  | 117       | 258  | 125        | 276  | 131    | 289  |
| 300        | 12   | 580 | 22 <sup>53</sup> / <sub>64</sub> | 495 | 19 <sup>7</sup> / <sub>16</sub>  | 240 | 9 <sup>7</sup> / <sub>16</sub>  | 490 | 19 <sup>9</sup> / <sub>32</sub>  | 156       | 344  | 167        | 368  | 147    | 324  |
| 350        | 14   | 580 | 22 <sup>53</sup> / <sub>64</sub> | 495 | 19 <sup>7</sup> / <sub>16</sub>  | 270 | 10 <sup>5</sup> / <sub>8</sub>  | 540 | 21 <sup>1</sup> / <sub>4</sub>   | 182       | 401  | 172        | 379  | 180    | 397  |



### Straight Flow, Flanged Connection – High Pressure Models 25 Bar / 360 psi

| Valve Size |      | L   |                                  | H   |                                  | D   |                                  | W   |                                  | Weight |       |
|------------|------|-----|----------------------------------|-----|----------------------------------|-----|----------------------------------|-----|----------------------------------|--------|-------|
|            |      |     |                                  |     |                                  |     |                                  |     |                                  |        |       |
| mm         | inch | mm  | inch                             | mm  | inch                             | mm  | inch                             | mm  | inch                             | kg     | lbs   |
| 50         | 2    | 228 | 8 <sup>31</sup> / <sub>32</sub>  | 169 | 6 <sup>21</sup> / <sub>32</sub>  | 85  | 3 <sup>11</sup> / <sub>32</sub>  | 175 | 6 <sup>57</sup> / <sub>64</sub>  | 10     | 22    |
| 50TH       | 2TH  | 250 | 9 <sup>27</sup> / <sub>32</sub>  | 120 | 4 <sup>23</sup> / <sub>32</sub>  | 42  | 1 <sup>21</sup> / <sub>32</sub>  | 175 | 6 <sup>57</sup> / <sub>64</sub>  | 6      | 13    |
| 80         | 3    | 310 | 12 <sup>13</sup> / <sub>64</sub> | 237 | 9 <sup>21</sup> / <sub>64</sub>  | 105 | 4 <sup>1</sup> / <sub>8</sub>    | 200 | 7 <sup>7</sup> / <sub>8</sub>    | 30     | 66.1  |
| 100        | 4    | 356 | 14 <sup>1</sup> / <sub>64</sub>  | 263 | 10 <sup>11</sup> / <sub>32</sub> | 120 | 4 <sup>23</sup> / <sub>32</sub>  | 260 | 10 <sup>15</sup> / <sub>64</sub> | 38     | 83.8  |
| 150        | 6    | 436 | 17 <sup>5</sup> / <sub>32</sub>  | 378 | 14 <sup>7</sup> / <sub>8</sub>   | 150 | 5 <sup>57</sup> / <sub>64</sub>  | 320 | 12 <sup>19</sup> / <sub>32</sub> | 75     | 165.3 |
| 200        | 8    | 530 | 20 <sup>55</sup> / <sub>64</sub> | 481 | 18 <sup>15</sup> / <sub>16</sub> | 180 | 7 <sup>1</sup> / <sub>32</sub>   | 400 | 15 <sup>3</sup> / <sub>4</sub>   | 123    | 271   |
| 250        | 10   | 636 | 25 <sup>1</sup> / <sub>32</sub>  | 546 | 21 <sup>1</sup> / <sub>2</sub>   | 215 | 8 <sup>15</sup> / <sub>32</sub>  | 495 | 19 <sup>7</sup> / <sub>16</sub>  | 190    | 419   |
| 400        | 16   | 709 | 27 <sup>29</sup> / <sub>32</sub> | 830 | 32 <sup>43</sup> / <sub>64</sub> | 310 | 12 <sup>13</sup> / <sub>64</sub> | 830 | 32 <sup>43</sup> / <sub>64</sub> | 433    | 955   |
| 450        | 18   | 715 | 28 <sup>5</sup> / <sub>32</sub>  | 830 | 32 <sup>43</sup> / <sub>64</sub> | 340 | 13 <sup>25</sup> / <sub>64</sub> | 830 | 32 <sup>43</sup> / <sub>64</sub> | 460    | 1014  |
| 500        | 20   | 900 | 35 <sup>7</sup> / <sub>16</sub>  | 970 | 38 <sup>3</sup> / <sub>16</sub>  | 490 | 19 <sup>9</sup> / <sub>32</sub>  | 980 | 38 <sup>37</sup> / <sub>64</sub> | 674    | 1486  |
| 600        | 24   | 900 | 35 <sup>7</sup> / <sub>16</sub>  | 970 | 38 <sup>3</sup> / <sub>16</sub>  | 490 | 19 <sup>9</sup> / <sub>32</sub>  | 980 | 38 <sup>37</sup> / <sub>64</sub> | 696    | 1534  |

\* TH = Threaded



# Series 100 Valves

## Technical Data


### Hydraulic Performance

| Valve Size              | mm                         | 20   | 25  | 40    | 50  | 65    | 80  | 80 <sub>LF</sub> | 100  | 150  | 200 <sub>LF</sub> | 200  | 250   | 300   | 350   | 400   | 450   | 500   | 600   |
|-------------------------|----------------------------|------|-----|-------|-----|-------|-----|------------------|------|------|-------------------|------|-------|-------|-------|-------|-------|-------|-------|
|                         | inch                       | 3/4  | 1   | 1 1/2 | 2   | 2 1/2 | 3   | 3                | 4    | 6    | 8                 | 8    | 10    | 12    | 14    | 16    | 18    | 20    | 24    |
| Max. Flow Continuanence | m <sup>3</sup> /hr         | 6    | 10  | 25    | 40  | 40    | 40  | 100              | 160  | 350  | 350               | 620  | 970   | 1400  | 1400  | 2500  | 2500  | 3890  | 5500  |
|                         | gpm                        | 26.4 | 44  | 110   | 176 | 176   | 176 | 440              | 700  | 1540 | 1540              | 2730 | 4268  | 6160  | 6160  | 11000 | 11000 | 17116 | 24200 |
| Max. Flow Intermittent  | m <sup>3</sup> /hr         | 16   | 27  | 68    | 109 | 109   | 109 | 245              | 273  | 955  | 955               | 1309 | 2645  | 3818  | 3818  | 6818  | 6818  | 10609 | 10609 |
|                         | gpm                        | 72   | 120 | 300   | 480 | 480   | 480 | 1080             | 1200 | 4200 | 4200              | 5760 | 11640 | 16800 | 16800 | 30000 | 30000 | 46680 | 46680 |
| Minimal Flow            | m <sup>3</sup> /hr         | < 1  |     |       |     |       |     |                  |      |      |                   |      |       |       |       |       |       |       |       |
|                         | gpm                        | < 5  |     |       |     |       |     |                  |      |      |                   |      |       |       |       |       |       |       |       |
| Kv                      | m <sup>3</sup> /hr @ 1 bar | 17   | 17  | 64    | 95  | 95    | 95  | 170              | 220  | 600  | 670               | 800  | 1250  | 1900  | 1900  | 2600  | 2600  | 4600  | 4600  |
| Cv                      | gpm @ 1 psi                | 20   | 20  | 75    | 110 | 110   | 110 | 200              | 260  | 700  | 780               | 930  | 1460  | 2220  | 2220  | 3030  | 3030  | 5370  | 5370  |
| Kv*                     | m <sup>3</sup> /hr @ 1 bar | -    | -   | -     | 78  | -     | -   | 120              | 200  | 550  | -                 | 800  | 1300  | -     | -     | 2600  | 2600  | 4600  | 4600  |
| Cv*                     | gpm @ 1 psi                | -    | -   | -     | 91  | -     | -   | 140              | 230  | 640  | -                 | 930  | 1520  | -     | -     | 3030  | 3030  | 5370  | 5370  |


\* High pressure models

$$\Delta P (\text{Bar}) = \left( \frac{Q \left[ \frac{\text{m}^3}{\text{hr}} \right]}{K_v} \right)^2 \quad \Delta P (\text{Psi}) = \left( \frac{Q [\text{gpm}]}{C_v} \right)^2$$


### Headloss Chart

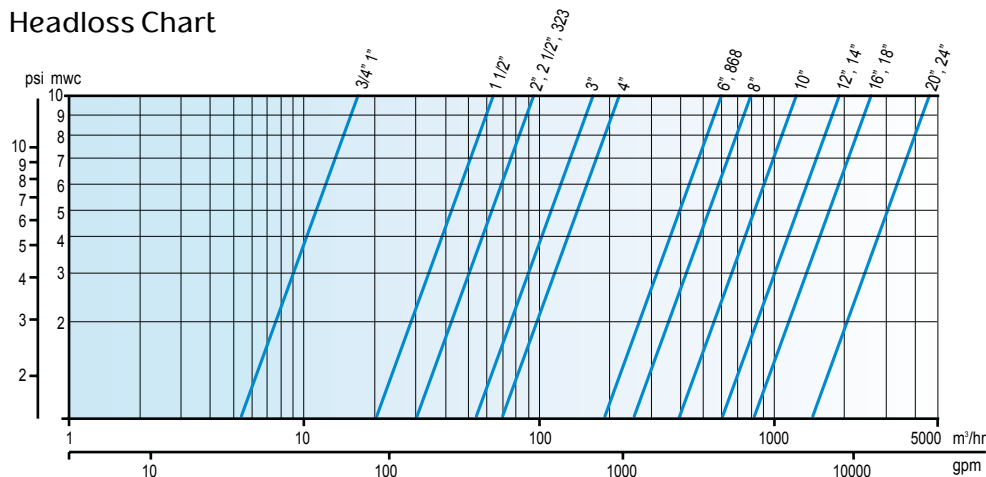

### Cavitation Data



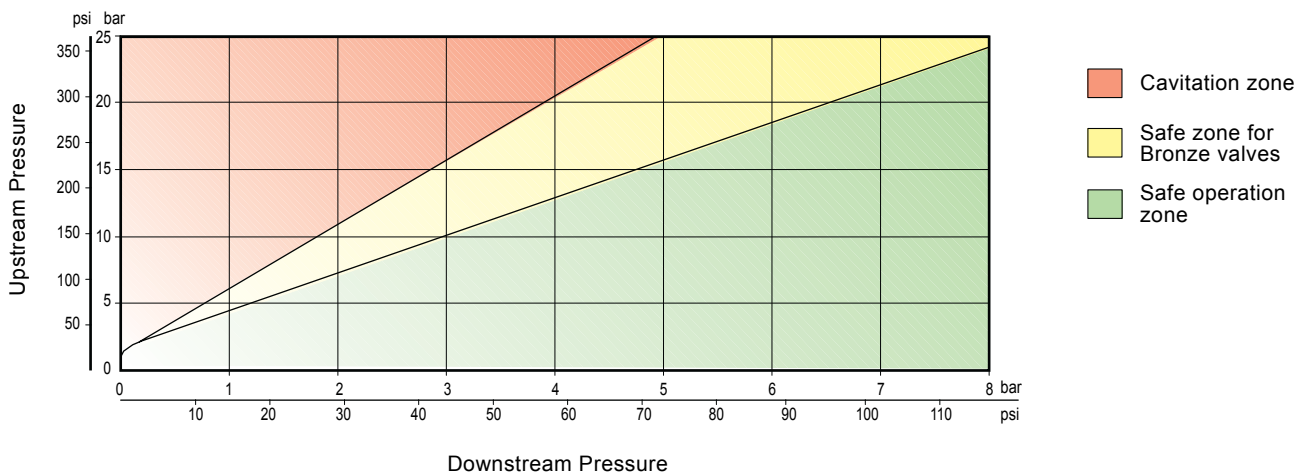


## Main Components

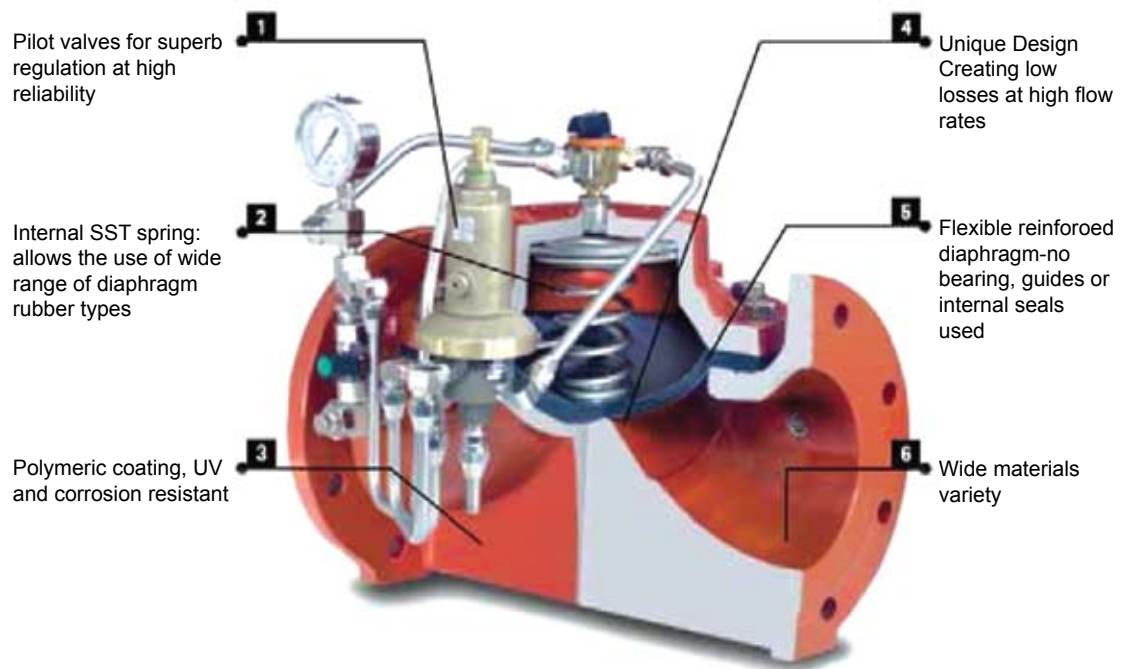

## Components

| Component No. | Description            |
|---------------|------------------------|
| 1             | Body                   |
| 2             | Bonnet                 |
| 3             | Diaphragm              |
| 4             | Spring                 |
| 5             | Spring Disc            |
| 6             | Bolt                   |
| 7             | Short Bolt             |
| 8             | Washer                 |
| 9             | Nut                    |
| 10            | Suspension Ring (Hook) |

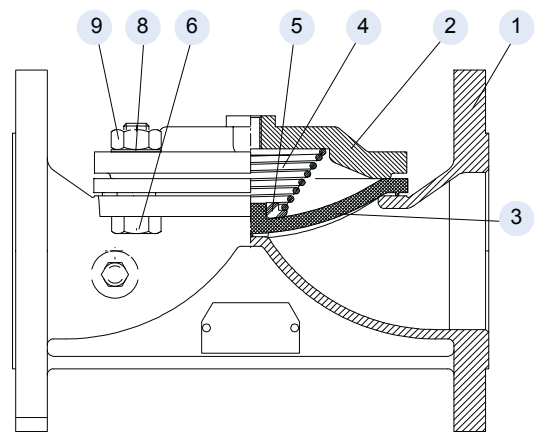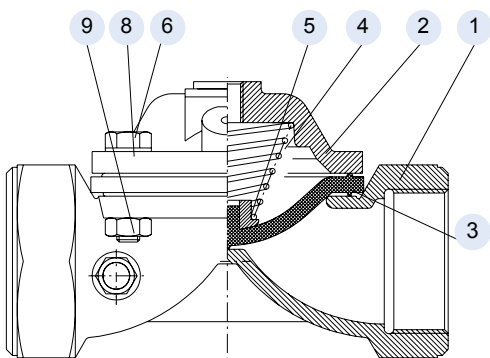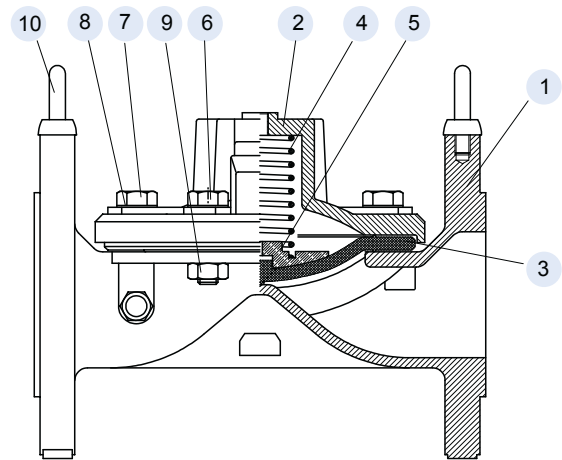

### **M** Manually Controlled Valve



#### Description

The valve is controlled manually by a three port selector that allows the user to select the closed, opened or remote-controlled position of the valve. The control is effected effortlessly and quickly, even under high pressure conditions

#### Features

- Effortless open/close activation
- Fast response
- Clog-free operation
- Can be added as manual over-ride to any other control function

#### Purchase Specifications

The valve will be a direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage.

The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure.


The valve position will be controlled by a hand operated selector valve. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

#### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)

#### Design Considerations


- The valve should be suited for the maximal flow and allowed headloss
- Preferred selection of low pressure diaphragms when the valve is expected to stay in open position for long periods

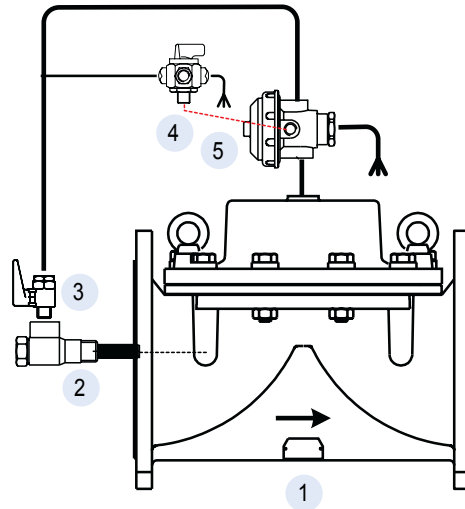

#### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 3-way selector valve
- 5 Accelerator relay (optional for valves larger than 150mm/6")

\* Optional component

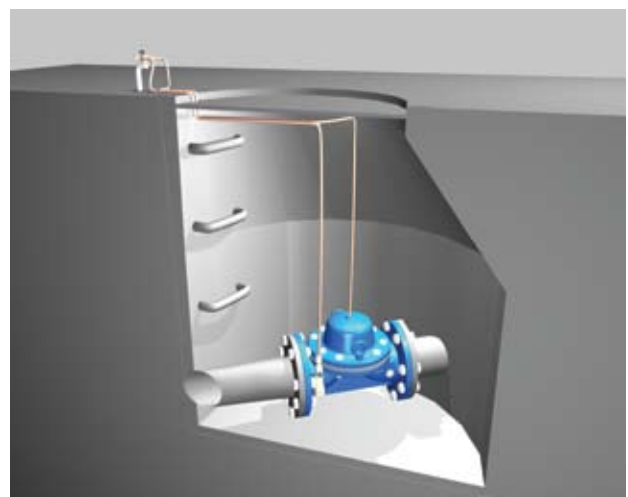

#### Typical Application

Dorot Manually controlled valve installed in an underground, flooded pit. Manual activation is enabled from top by the selector valve.

## EL Solenoid Controlled Valve



### Description

A 3-way solenoid valve, activated by an electric current or an electric pulse, opens or closes the main valve. The standard valve is supplied in the "normally closed" position. The "normally open" position is optional. Electric activation can be added to other control applications on request.

### Features

- Low power electric activation
- Fast response
- Simple and reliable design
- Can be added as electric over-ride to any other control function

### Purchase Specifications


The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage. The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve position will be controlled by an electric solenoid valve. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)

### Design Considerations

- The valve should be suited for the maximal flow and allowed headloss
- Prefer selection low pressure diaphragms when the valve is expected to stay in open position for long periods
- The valve can be opened by the electric command (NC) or closed by it (NO). The definition refers to the main valve operation and not the solenoid's characteristics

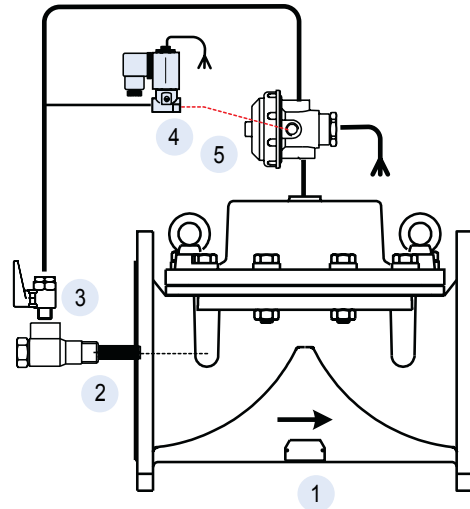

### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 3/2 Solenoid valve
- 5 Accelerator relay (optional for valves larger than 150mm/6")

\* Optional component



### Typical Application

Dorot Solenoid Controlled valve, controlled by a local controller.

# Series 100 Valves

## Control Functions

### RC Hydraulic Remote Controlled Valve



#### Description

A 3-way relay valve, activated by hydraulic or pneumatic pressure command, opens or closes the main valve. The standard valve is supplied in the "normally closed" position. The "normally open" position is optional. Hydraulic activation can be added to other control applications on request.

#### Features

- Fast response even for long control lines
- Simple and reliable design
- Can be added as pressure command over-ride to any other control function

#### Purchase Specifications


The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage. The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve position will be controlled by a hydraulic relay. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

#### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)

#### Design Considerations

- The valve should be suited for the maximal flow and allowed headloss
- Prefer selection low pressure diaphragms when the valve is expected to stay in open position for long periods
- The valve can be opened by the pressure command (NC) or closed by it (NO). The definition refers to the main valve operation and not the relay's characteristics

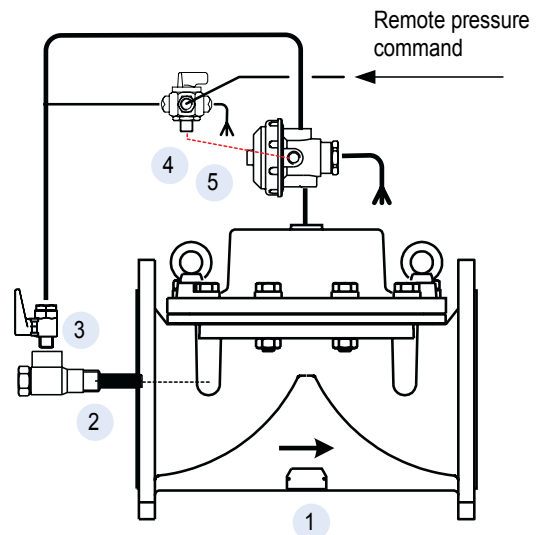

#### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Manual over-ride selector valve\*
- 5 Accelerator relay (other types are optional)

\* Optional component



#### Typical Application

Dorot Hydraulic Remote Controlled Valve, activated by a remote pressure command.

## PR Pressure Reducing Valve



### Description

The valve maintains a preset downstream pressure, regardless of upstream pressure or flow rate fluctuation. The main valve is controlled by either a 3-way pilot valve (allowing full opening when upstream pressure drops below the pressure set-point), or by a 2-way pilot valve (creating a minimal differential in open position).

### Features

- Accurate, stable control from no-flow to full flow
- Simple and reliable design
- Exceptionally low losses at high flow
- WRAS Approval no. 04251

### Purchase Specifications


The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage. The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve will be operated by a pressure reducing pilot valve to achieve constant outlet pressure, regardless of upstream pressure or flow variations. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)

### Design Considerations


- The valve should be suited for the maximal flow and allowed headloss
- In case upstream pressure may drop to the required set pressure, select 3-way control pilot
- Large pressure differentials may cause cavitation damage. Consult Dorot for solutions if such conditions are expected

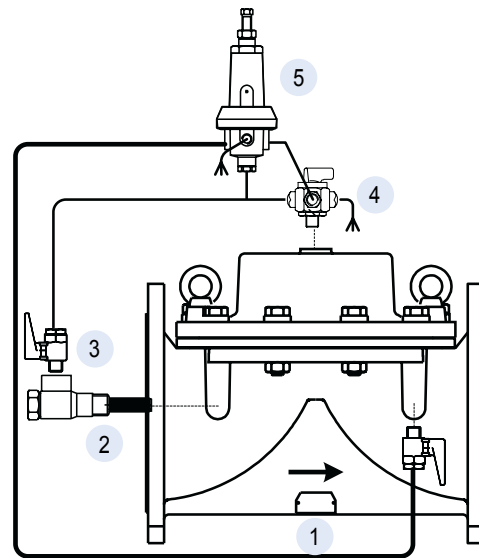

### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Manual over-ride selector valve\*
- 5 3-way pilot valve (other types are optional)

\* Optional component

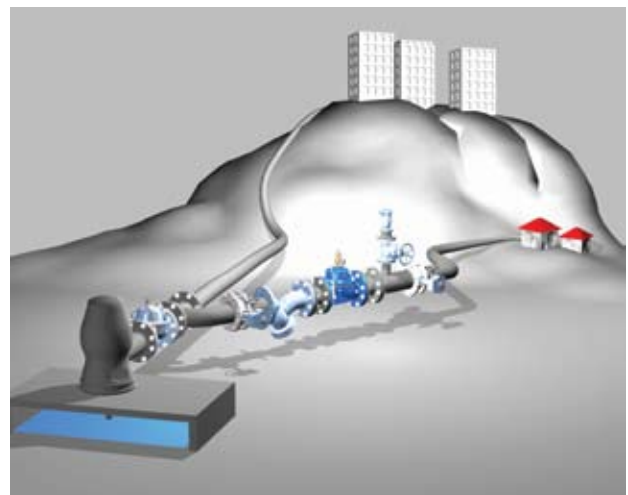

### Typical Application

Dorot Pressure Reducing Valve reduces varying supply pressure to a stabilized downstream pressure.

# Series 100 Valves

## Control Functions

### PS Pressure Sustaining & Relief Valve



#### Description

The valve maintains upstream pressure, regardless of flow rate variations. The valve will be in the “closed” position if the upstream pressure drops below the set-point and will fully open when the upstream pressure exceeds the set-point.

#### Features

- Accurate, stable control from no-flow to full flow
- Simple and reliable design
- Exceptionally low losses at high flow

#### Purchase Specifications


The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage. The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve will be operated by a pressure sustaining pilot valve to maintain constant inlet pressure, regardless of flow variations. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

#### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)

#### Design Considerations


- The valve should be suited for the maximal flow and allowed headloss
- Check for possible cavitation conditions and consult Dorot in case such conditions are expected

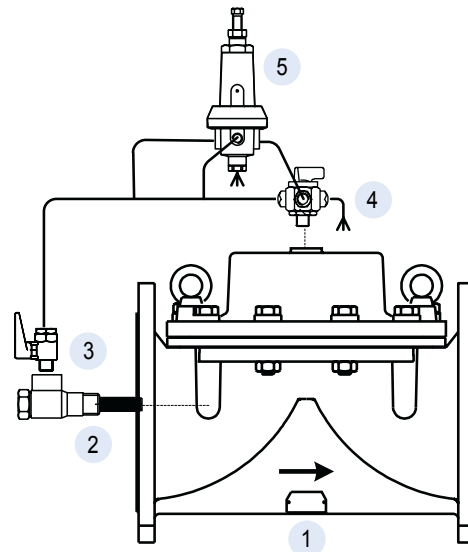

#### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Manual over-ride selector valve\*
- 5 3-way pilot valve (other types are optional)

\* Optional component

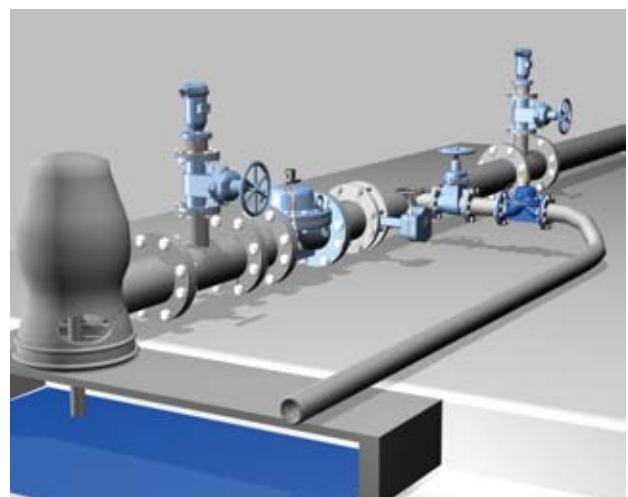

#### Typical Application

Dorot Pressure Relief Valve relieving pump surplus flow from the system, thus preventing high pressure at low demand conditions.

## DI Pressure Differential Sustaining Valve



### Description

The valve maintains a preset pressure differential between its upstream and downstream sides. The valve can control booster pump discharge, heating and cooling systems, bypass configurations, filters and other similar systems.

### Features

- Accurate, stable control from no-flow to full flow
- Simple and reliable design
- Exceptionally low losses at high flow

### Purchase Specifications

The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage. The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve will be operated by a pressure sustaining differential pilot valve so to maintain a minimal pressure differential, regardless of flow variations.


The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)

### Design Considerations


- The valve should be suited for the maximal flow and allowed headloss
- Check for possible cavitation conditions and consult Dorot in case such conditions are expected
- The connection points of the sensing tubes must be selected in locations free of turbulence and local interferences

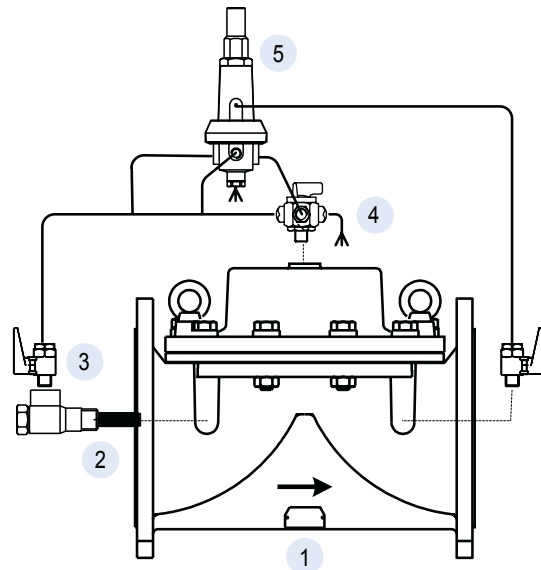

### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Manual over-ride selector valve\*
- 5 3-way pilot valve (other types are optional)


\* Optional component

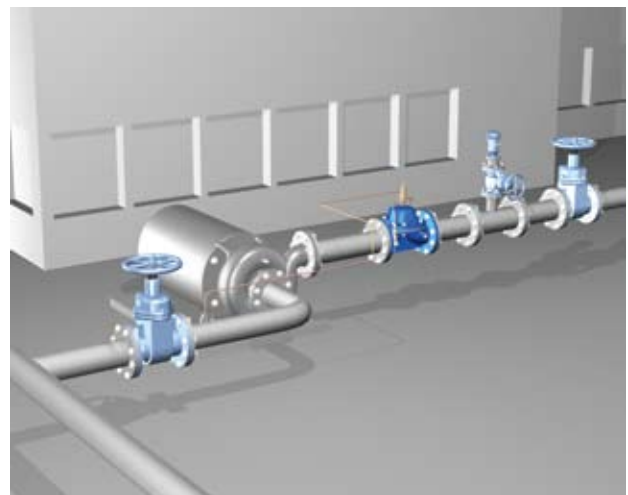

### Typical Application

Dorot Pressure Differential Sustaining Valve controls the flow at the discharge of a booster pump whose suction pressure varies.

### FR Flow Control Valve

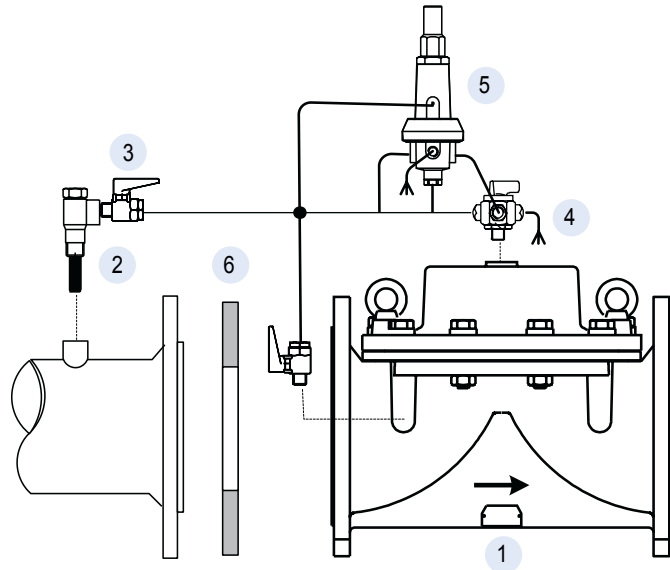

#### Description

The valve limits the flow rate in the network to a preset , value regardless of upstream pressure variations. The valve fully opens when the flow rate drops below the set point.

#### Features

- Accurate, stable control
- Simple and reliable design
- Low losses when the demand is lower than the set flow

#### Purchase Specifications

The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage.

The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve will be operated by a pressure reducing differential pilot valve for controlling the flow through the main valve, regardless of pressure variations. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

#### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)


#### Design Considerations

- A 1/2" pressure sensing port should be provided, upstream of the valve
- Check for possible cavitation conditions and consult Dorot in case such conditions are expected
- An additional pressure loss of about 2.5 mwc is created by the orifice plate (at the set flow)

#### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Manual over-ride selector valve\*
- 5 3-way differential pilot valve (other types are optional)
- 6 Orifice plate

\* Optional component

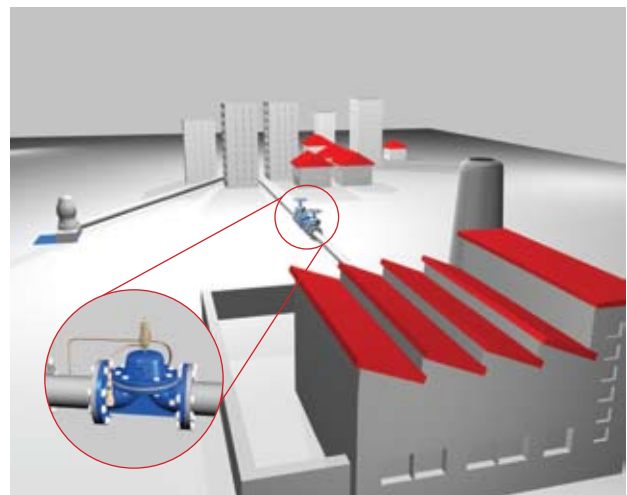

#### Typical Application

Dorot Flow Control Valve limits the flow to a specific customer.

## FE Excessive Flow Shut-off Valve



### Description

The valve closes drip tight when the flow rate exceeds the normal value (due to pipe rupture). The valve will manually re-set open after fixing the break.

### Features

- Hydraulic burst protection. No electronic controllers are used
- Simple and reliable design
- Low losses

### Purchase Specifications

The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage.


The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve will be operated by a pressure reducing differential pilot valve for closing when the flow through the main valve exceeds the safe level, regardless of pressure variations. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)

### Design Considerations


- A 1/2" pressure sensing port should be provided, upstream of the valve
- The valve is adjusted to close when the flow rate exceeds the maximal design flow by 10%-20%
- An additional pressure loss of about 2 mwc is created by the orifice plate (at the normal flow)

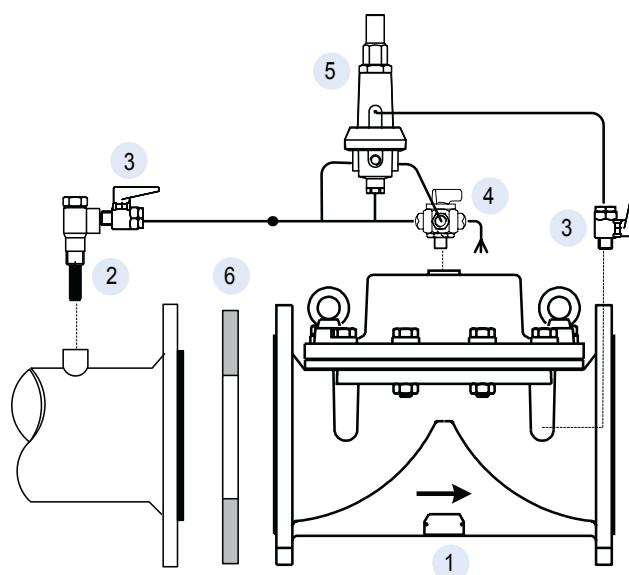

### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Manual over-ride selector valve\*
- 5 3-way differential pilot valve (other types are optional)
- 6 Orifice plate

\* Optional component

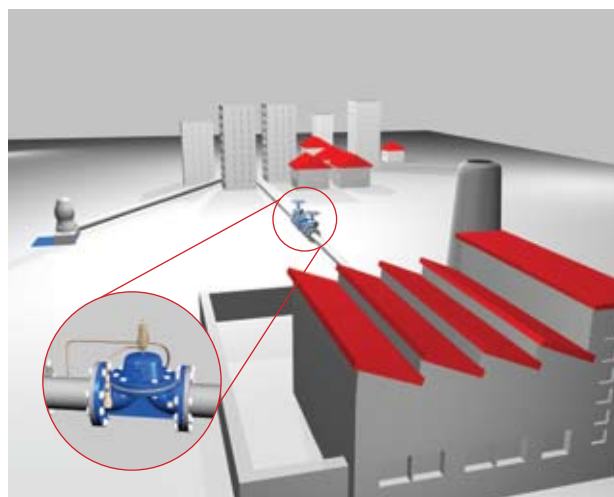


### Typical Application

Dorot excessive flow shutoff valve installed to prevent flood damages caused by pipe rupture.

# Series 100 Valves

## Control Functions

### FL Modulating Float Controlled Valve

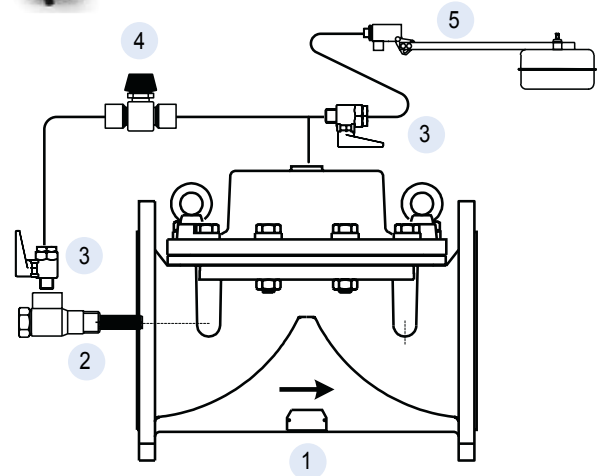

#### Description

The main valve is controlled by a float valve, located in the tank or reservoir and set at the required maximum water level. The valve maintains the maximum level continuously.

#### Features

- Accurate and repeatable level control
- Simple and reliable design
- Easy installation and maintenance
- Adjusts the inlet flow to the reservoir's outlet flow
- WRAS Approval no. 0009092

#### Purchase Specifications

The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage.

The valve will be activated by the line pressure and be operated by a modulating, 2-way float activated pilot valve. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

#### Quick Sizing

- Valve size same as the fill line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)


#### Design Considerations

- The valve should be suited for the maximal flow
- Upstream pressure at closed position should be at least 10m (15psi) higher than the hydrostatic water pressure at the downstream
- Large pressure differentials may cause cavitation damage. Consult Dorot for solutions if such cases are expected
- Prefer use of differential level control in case excessive noise should be avoided (residential areas)

#### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Needle valve
- 5 Modulating float pilot valve


\* Optional component

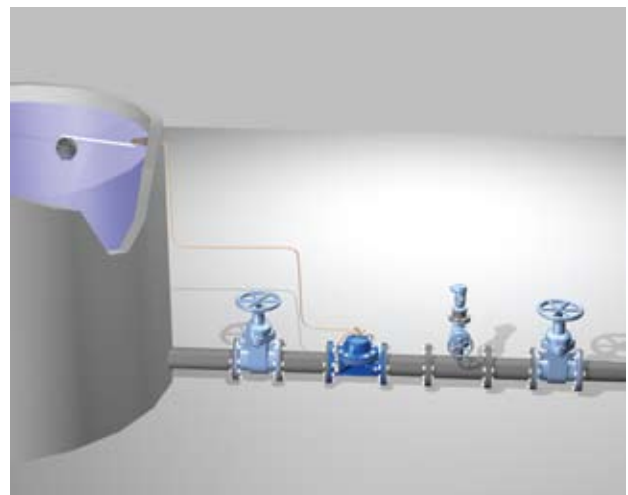

#### Typical Application

Dorot Modulating Float Controlled valve prevents tank overflow.

## FLEL Electric Float Controlled Valve

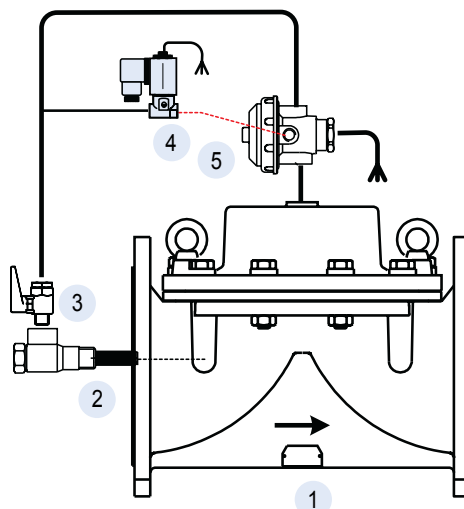

### Description

An electric sensor float, located in the tank/reservoir, sends a command to a solenoid controlled valve. The main valve will fully open when the solenoid is activated and will close drip tight when the solenoid is de-energized, thus enabling accurate and reliable differential level control.

Optional Addition: Stepped Surge-Preventing Closure.

### Features

- Accurate and repeatable differential level control
- Low power electric activation
- Fast response
- Simple and reliable design
- Easy installation and maintenance

### Purchase Specifications

The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage.

The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve position will be controlled by an electric solenoid valve activated from a float in the tank/reservoir. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)


### Design Considerations

- The valve should be suited for the maximal flow and allowed headloss
- The valve can be opened by the electric command (NC) or closed by it (NO). The definition refers to the main valve operation and not to the solenoid's characteristics

### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 3/2 Solenoid valve
- 5 Accelerator relay (optional for valves larger than 150mm/6")
- 6 Electric float switch

\* Optional component

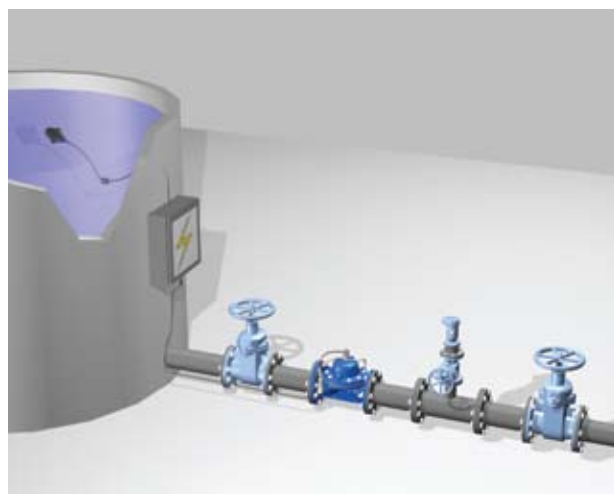


### Typical Application

Dorot Electric Float Controlled Valve controlling the water volume in a tank.

# Series 100 Valves

## Control Functions

### FLDI Differential Float Controlled Valve

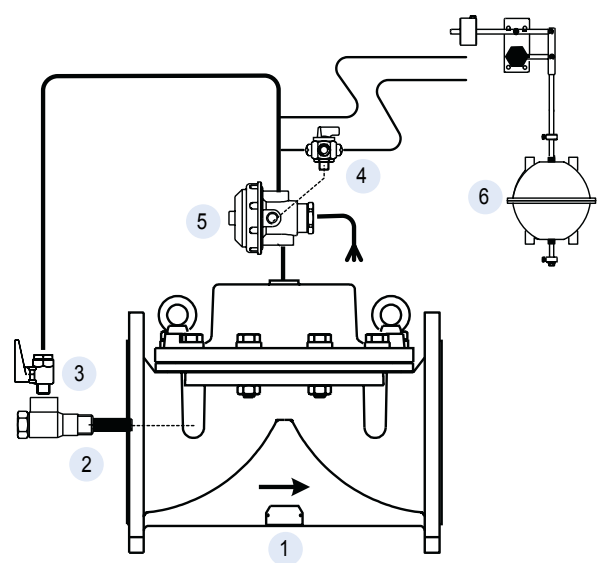

#### Description

A float valve controls the main valve, closing it when the water reaches maximum level, and opening it when the water drops to its preset minimum level. The differential between the maximum and the minimum levels is adjustable.  
Optional Addition: Stepped Surge-Preventing Closure.

#### Features

- Accurate and repeatable differential level control
- Adjustable differential
- Fast response
- Simple and reliable design
- Easy installation and maintenance

#### Purchase Specifications

The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage.

The valve will be activated by the line pressure or by an external hydraulic pressure. The valve position will be controlled by a 4-way float pilot located at the top of the tank/reservoir. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

#### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)


#### Design Considerations

- The valve should be suited for the maximal flow
- Upstream pressure at closed position should be at least 10m (15psi) higher than the static water pressure at the downstream
- Fast stream and waves may cause mechanical damage to the float levers. It is advisable to install the pilot in a still part of the reservoir

#### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Manual over-ride selector valve\*
- 5 Accelerator relay (optional for valves larger than 150mm/6")
- 6 4-way differential pilot valve (other types are optional)

\* Optional component

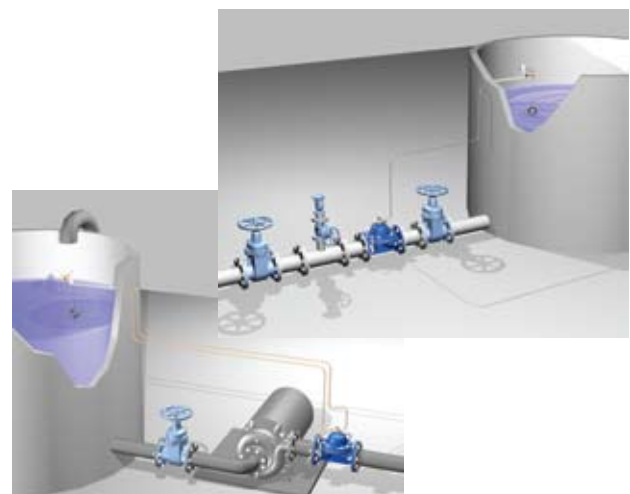

#### Typical Application

Dorot Differential Float Pilot Controlled Valve controlling the water volume in a filling or emptying tank.

## AL Altitude Pilot Controlled Valve



### Description

The main valve is controlled by a highly sensitive pilot, located outside the tank. The pilot opens or closes the valve in response to the static pressure of the water. The pilot allows for differential adjustments between the maximum and minimum level. Optional Addition: Stepped Surge-Preventing Closure.

### Features

- Accurate and repeatable differential level control
- Fast response
- Easy access - no float is located in the tank/reservoir
- Simple and reliable design
- Easy installation and maintenance

### Purchase Specifications

The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage.


The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve position will be controlled by a hydrostatic pressure sensing pilot valve. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)

### Design Considerations

- The valve should be suited for the maximal flow
- The pilot valve must be located at least 2 meters below the closing level in the tank
- When water-hammer/surge expected during closure - add stepped surge preventing closure function to the altitude control pilot

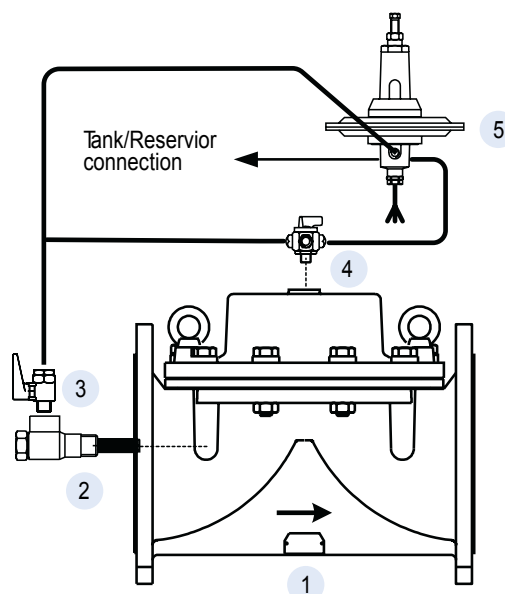

### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Manual over-ride selector valve\*
- 5 High sensitivity altitude control pilot valve

\* Optional component



### Typical Application

Dorot Altitude Pilot Controlled Valve controlling the water volume in an elevated tank.

# Series 100 Valves

## Control Functions

### BC Booster Pump Control Valve



#### Description

The valve eliminates damaging surges caused by pump start-up and shut-off. The electrically activated valve gradually opens on pump start up, and slowly closes before the pump is switched off. The valve will automatically close drip tight in case of power failure. Optional Additions: Flow Rate Limitation, Extended Closure, Two Stage Operating, Pressure Reducing and Pressure Sustaining.

#### Features

- No slam operation
- Exceptionally low losses at high flow conditions
- Simple and reliable design
- Easy installation and maintenance

#### Purchase Specifications


The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage. The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve position will be controlled by an electric solenoid valve with adjustable open close speed control valves. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

#### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)

#### Design Considerations


- The valve should be suited for the maximal flow
- Closure time is related to the pipe length and should be extended for longer pipe
- For power failure situations, add a fast reacting checkvalve in series and a surge anticipating valve to relief possible surges

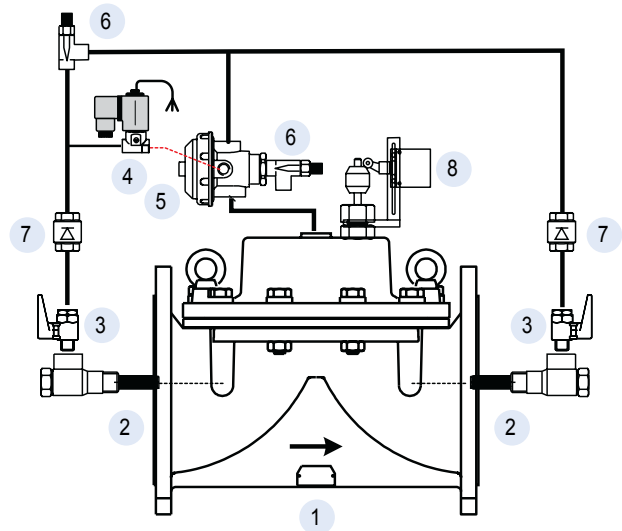

#### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 3/2 Solenoid valve
- 5 Accelerator relay (optional for valves larger than 150mm/6")
- 6 Open/close speed adjustment needle valve
- 7 Check valve
- 8 Limit switch assembly

\* Optional component

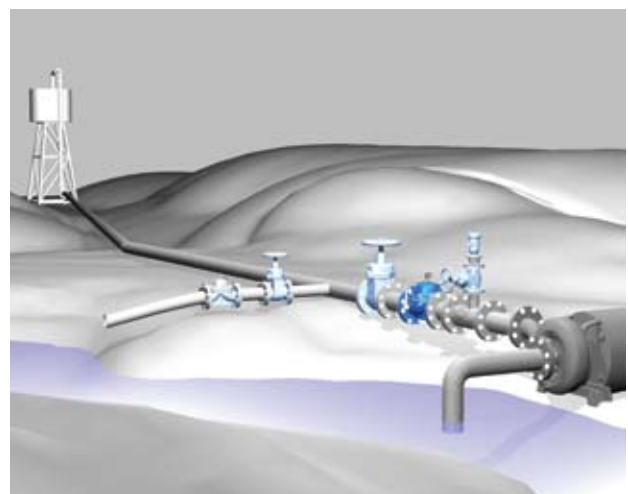

#### Typical Application

Dorot Booster Pump Control Valve preventing surges caused by pump startup and shutoff and drainage of main pipe.

## DW Deep Well (Borehole) Pump Control Valve



### Description

The valve eliminates surges caused by the start-up and shut-off of vertical or submersible pumps. It is a relief valve, assembled on a T-junction of the main pipeline. When the pump starts, the valve slowly closes, gradually increasing network pressure. Before pump shut-off, the valve slowly opens, gradually reducing network pressure.

### Features

- No slam operation
- Simple and reliable design
- Easy installation and maintenance
- Low Resistance and high flow capacity

### Purchase Specifications


The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage. The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve position will be controlled by an electric solenoid valve with adjustable open/close speed control valves. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

### Quick Sizing

- The valve should be sized to match the well flow at 5 mwc/8 psi in the valve site (pump head water table depth):  
 $D[\text{mm}] \geq 170 \times \sqrt{\text{Flow} [\text{m}^3/\text{hr}]}$   
 $D[\text{inch}] \geq 0.55 \times \sqrt{\text{Flow} [\text{gpm}]}$

### Design Considerations

- The valve should be suited for the maximal flow
- Closure time is related to the pipe length and should be extended for longer pipe
- For power failure situations, add a fast reacting checkvalve in series and a surge anticipating valve to relief possible surges

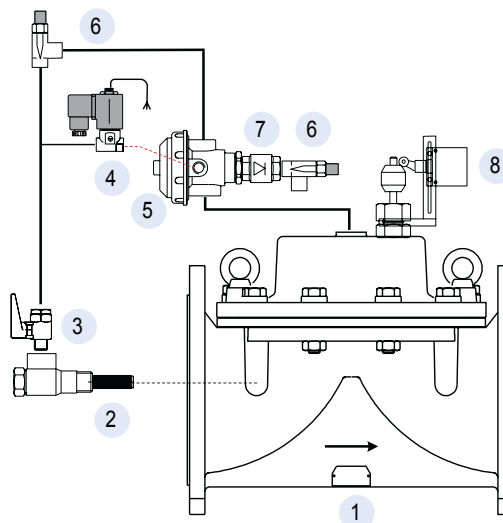

### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 3/2 Solenoid valve
- 5 Accelerator relay (optional for valves larger than 150mm/6")
- 6 Open/close speed adjustment needle valve
- 7 Check valve
- 8 Limit switch assembly

\* Optional component



### Typical Application

Dorot Deep Well Pump Control Valve preventing surges caused by pump start-up or shut-off.

# Series 100 Valves

## Control Functions

### RE Surge Anticipating Valve



#### Description

The valve protects the pumping system from water hammer, caused by sudden pump shut-off (case of power failure, for example). The valve is assembled on a T-junction of the main pipeline, instantly opens when the pump stops, relieving the returning high pressure wave. The valve slowly closes once the pressure returns to the static level. The valve also functions as a pressure relief valve.

#### Features

- No slam operation
- Simple and reliable design
- Easy installation and maintenance
- Low Resistance and high flow capacity
- Protection for sewage as well as clean water pumping systems

#### Purchase Specifications


The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage. The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve will be operated by pressure relief pilot valve for opening at a low pressure set point and another pilot for pressure relief at a high pressure set-point. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

#### Quick Sizing

- The valve should be sized to match the 80% of the normal flow at static head in the valve site:  
 $D[\text{mm}] \leq \sqrt{(250 \times \text{Flow}[\text{m}^3/\text{hr}] / \sqrt{\text{Pressure}[\text{mwc}]})}$   
 $D[\text{inch}] \leq \sqrt{(0.109 \times \text{Flow}[\text{gpm}] / \sqrt{\text{Pressure}[\text{psi}]})}$

#### Design Considerations


- Install a manual separation/throttling valve, upstream of the valve position
- Closure time is related to the pipe length and should be extended for longer pipe
- The valve sensor tube must be connected to the main line

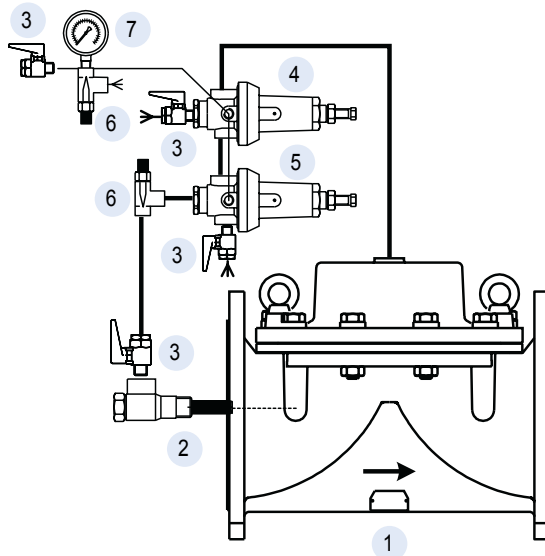

#### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Low-pressure relief pilot valve
- 5 High-pressure relief pilot valve
- 6 Needle valve
- 7 Pressure gauge

\* Optional component

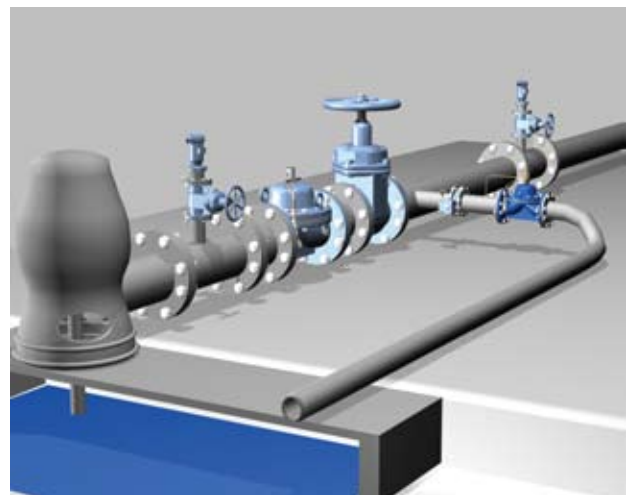

#### Typical Application

Dorot Surge Anticipating Valve prevents water-hammer surges caused by an un-expected pump shut-off.

## QR Quick Pressure-relief Valve



### Description

The valve opens instantly when the pressure in the pipeline exceeds the safe level, thus relieving excessive pressure from the network. When the pressure returns to normal, the valve closes slowly, at an adjustable pace.

### Features

- No slam operation
- Simple and reliable design
- Easy installation and maintenance
- Low Resistance and high flow capacity
- Protection for sewage as well as clean water pumping systems

### Purchase Specifications

The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage. The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve will be operated by a pressure relief pilot valve for fast opening at a high pressure set-point. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

### Quick Sizing


- The valve should be sized to match the expected relief flow at the set opening pressure:  

$$D[\text{mm}] \leq \sqrt{(250 \times \text{Flow}[\text{m}^3/\text{hr}] / \sqrt{\text{Pressure}[\text{mwc}]})}$$

$$D[\text{inch}] \leq \sqrt{(0.109 \times \text{Flow}[\text{gpm}] / \sqrt{\text{Pressure}[\text{psi}]})}$$

### Design Considerations


- Install a manual separation valve, upstream of the valve position
- Closure time is related to the pipe length and should be extended for longer pipe
- The valve opens instantly at the set pressure. For regulating the system pressure use a Pressure Sustaining Relief Valve and not a Quick Relief valve

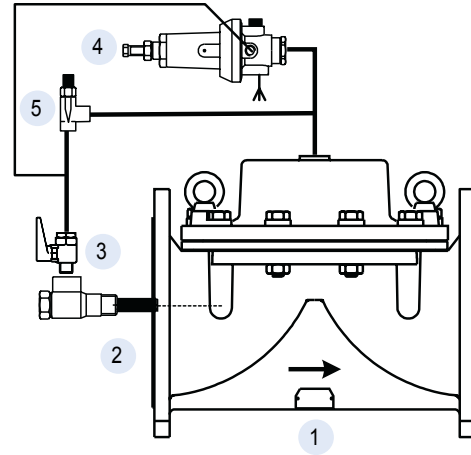

### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Pressure relief pilot valve
- 5 Needle valve

\* Optional component

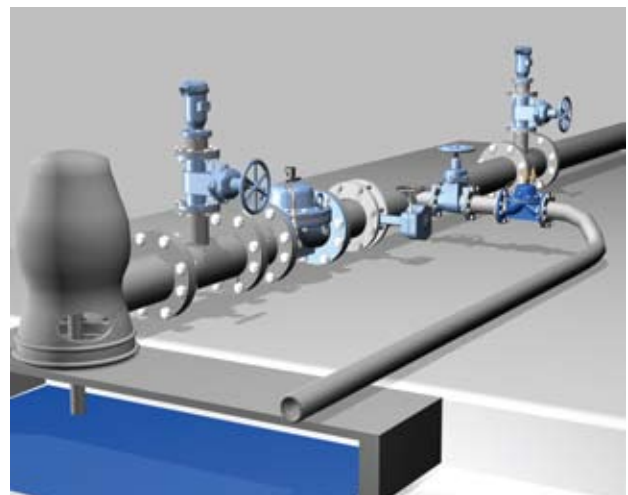

### Typical Application

Dorot Quick Pressure-relief Valve protects a system against pressure surges caused by pump start-up or valves closure.

# Series 100 Valves

## Control Functions

### TO Two Stage Opening Addition



#### Description

The device can be added to any control function and will prevent damage caused by too fast filling of a drained pipeline. The flow rate will be restricted, until the network, downstream of the valve is full and then a full opening of the valve is enabled. Please consult DOROT for more details.

#### Features

- Can be added to any pipe-filling control function
- User adjusted filling pace
- Completely hydraulic – no electronic controllers, batteries or relays are used
- Simple and reliable design

#### Purchase Specifications

The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage.


The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve's opening will be restricted by a two-stage opening control that limits the filling flow until the downstream system is full. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

#### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)

#### Design Considerations


- The valve should be suited for the maximal flow and allowed headloss
- Prefer selection low pressure diaphragms when the valve is expected to stay in open position for long periods

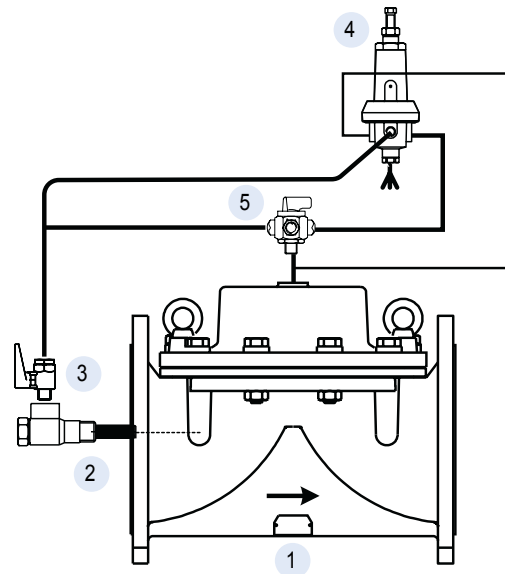

#### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Pilot valve
- 5 3-way selector valve\*


\* Optional component

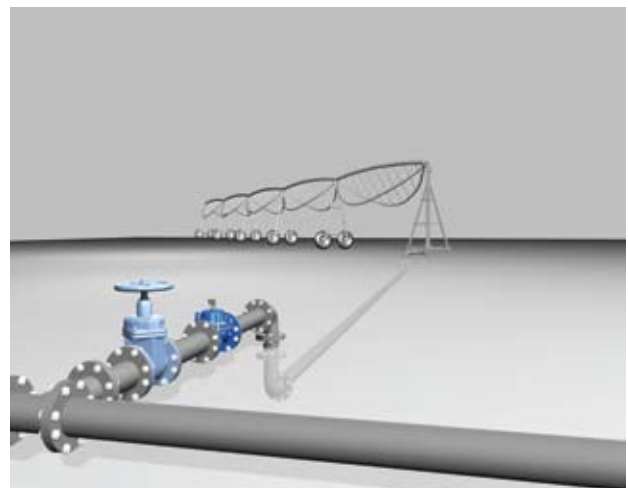

#### Typical Application

Dorot two-stage function prevents water-hammer/surges caused by fast drained pipe filling.

## SP Surge Preventing Stepped-Closure Addition

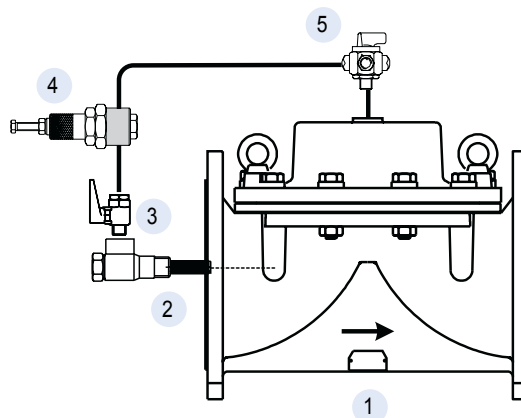

### Description

The device can be added to any control function and automatically adjusts the closing speed of a valve that is located at the end of a long pipeline. This ensures a moderate flow change pace that prevents pressure surges from evolving. Please consult DOROT for more details

### Features

- Can be added to any fast closing control function
- Automatically self-adjusted closing pace
- Completely hydraulic – no electronic controllers, batteries or relays are used
- Simple and reliable design

### Purchase Specifications

The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage.

The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve's closure pace will be controlled by a stepped closure control pilot that stops the closing procedure whenever surge waterhammer conditions evolve. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)


### Design Considerations

- The valve should be suited for the maximal flow and allowed headloss
- Prefer selection low pressure diaphragms when the valve is expected to stay in open position for long periods
- Should be used whenever the supply pipe is longer than 2 km/ 1.2 mile and the flow speed exceeds 1.5 m/sec

### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 Stepped closure adjusting pilot valve
- 5 3-way selector valve\*

\* Optional component

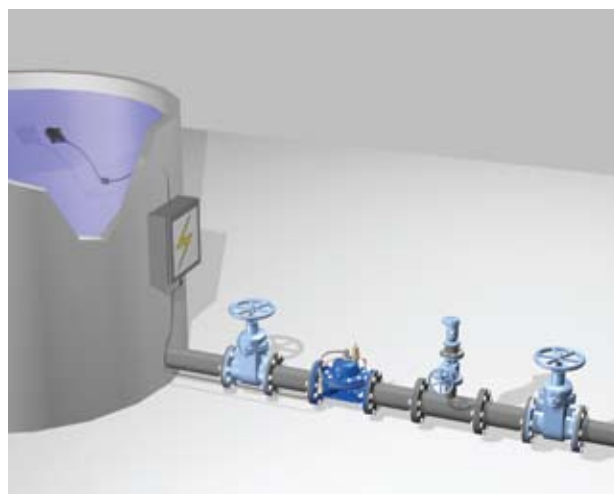

### Typical Application

Dorot stepped closure function prevents water-hammer surges caused by fast closing level control valve.

# Series 100 Valves

## Control Functions

### EC PLC Controlled Valve



#### Description

The valve is controlled by a PLC controller that enables local or remote control of various functions such as, time related operation, the batching of liquid, and conditional (automatically modified) control parameters, in various applications. A recommended option is using the Dorot "ConDor" controller that enables the selection from a vast range of pre-programmed control functions and their combinations.

#### Features

- Can perform any control function
- Highly accurate and reliable electronic control
- Low power actuation
- Simple and reliable design
- Controlled by Dorot ConDor valve controller or by a third party controller

#### Purchase Specifications


The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located within the water passage. The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve position will be determined by a set of two solenoid valves controlled by a PLC controller. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

#### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for continuous operation 5.5 m/sec (18 ft/sec)

#### Design Considerations


- The valve should be suited for the maximal flow and allowed headloss
- Solenoid wiring diameter should be selected so that the activation voltage - losses will equal the rated value  $\pm 10\%$

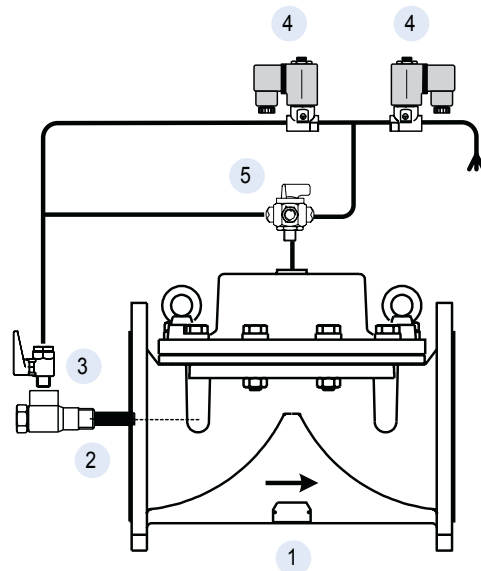

#### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Cock valve\*
- 4 2/2, NC solenoid valve
- 5 3-way selector valve\*



\* Optional component

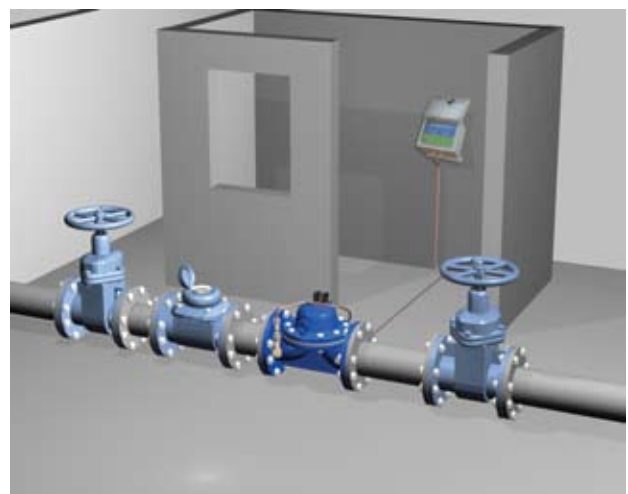

#### Typical Application

Dorot PLC Controlled Valve adjusts the flow rate following a set-point signal sent from a remote center.

## DE Deluge Dry-pipe and Pre-action Valves

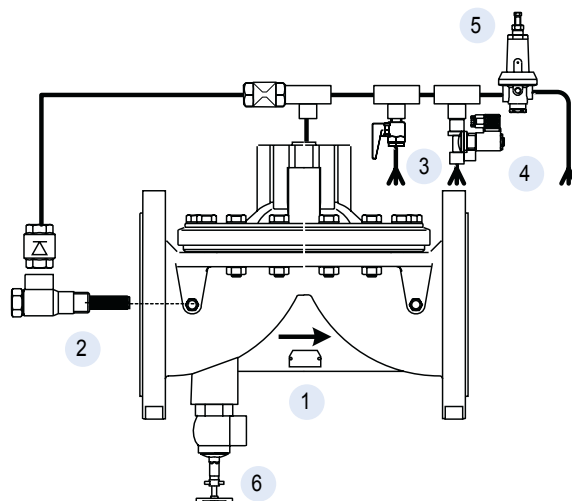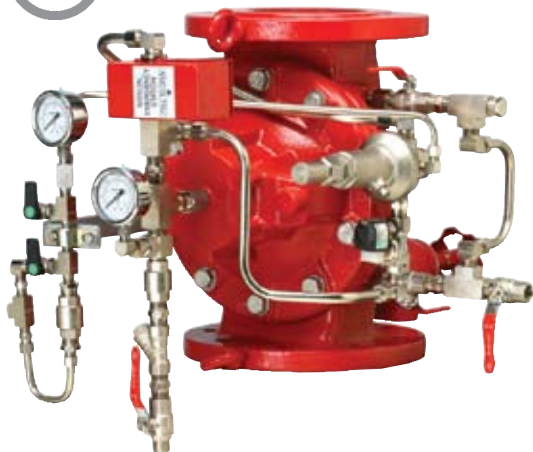

### Description

The valve prevents flow of water into fire extinguishing sprinklers system until it is activated by the activation devices. Different valve and control system configurations are available to meet the customer and relevant standards demands. Please check Dorot Fire-Fighting publications for further information.

### Features

- Fast opening
- Simple and reliable design
- Automatic reset
- Wide range of applications
- UL Approval no. VLFT EX.6543

### Purchase Specifications

The valve will be hydraulic, direct sealing diaphragm type, which allows inline maintenance. No stem, shaft or guide bearing will be located with in the water passage.

The valve will be activated by the line pressure or by an external hydraulic or pneumatic pressure. The valve and the controls will be a Dorot Series 100 valve or similar in all aspects.

### Quick Sizing

- Valve size same as line or one size smaller
- Maximum flow speed for intermittent operation 8 m/sec (26 ft/sec)


### Design Considerations

- The valve should be suited for the maximal flow and allowed headloss
- Check Dorot catalogue for Fire Fighting Valves for more information with regards to valve and applications types

### Optional Control System Components:

- 1 Main Valve
- 2 Self-flushing filter
- 3 Manual activation valve
- 4 Solenoid activation\*
- 5 Pilot activation (by detection line)\*
- 6 Drain valve

\* Optional component

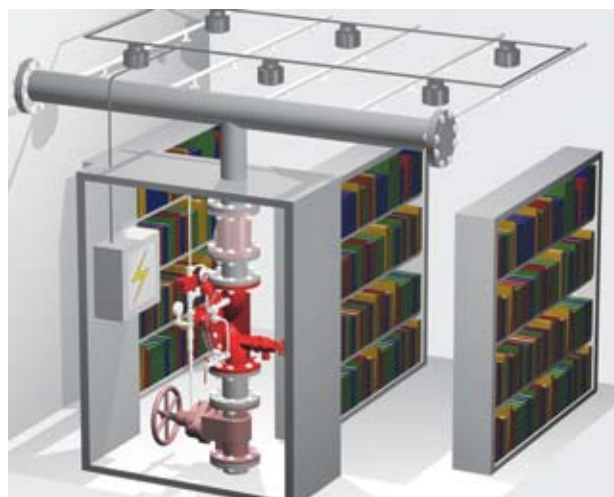

### Typical Application

Dorot valve, activated by a sprinkler detection line.

### Plastic Mini Pilots

For valve sizes 20mm to 100mm -  $\frac{3}{4}$ " to 4"

Pressure rating: 10 bar / 145 psi

|        |                                                                                   |
|--------|-----------------------------------------------------------------------------------|
| 29-100 | 3-way pressure reducing pilot valve                                               |
| 29-200 | 3-way multi purpose (pressure reducing and sustaining) pilot valve                |
| 29-300 | 3 way differential multi purpose (flow control, differential pressure sustaining) |




### Metal Mini Pilots

For valve sizes 20mm to 150mm -  $\frac{3}{4}$ " to 6"

Pressure rating: 25 bar / 360 psi

|             |                                                                                  |
|-------------|----------------------------------------------------------------------------------|
| 68-410      | 2-way pressure reducing pilot valve                                              |
| 68-500      | 2-way pressure sustaining pilot valve                                            |
| 68-220      | 3-way (pressure rating 16bar / 230psi) pressure reducing pilot valve             |
| 31-10 R/F/S | 3-way multi purpose (pressure reducing and sustaining, flow-control) pilot valve |

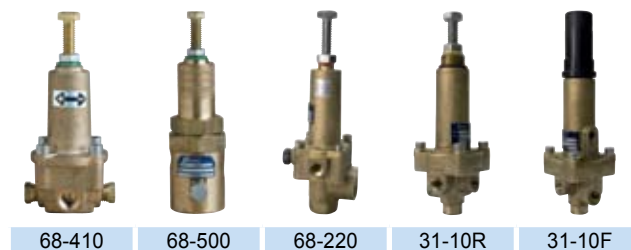

### Metal Pilots

For valve sizes 40mm to 600mm -  $1\frac{1}{2}$ " to 24"

Pressure rating: 25 bar / 360 psi

|        |                                                                                                  |
|--------|--------------------------------------------------------------------------------------------------|
| CXPR   | 2-way pressure reducing pilot valve (CXRS - remote sensing, CXRD differential pressure reducing) |
| CXPS   | 2-way pressure sustaining pilot valve (CXSD differential pressure sustaining)                    |
| 31-310 | 3-way multi purpose (pressure reducing and sustaining) pilot valve                               |
| 76-200 | 3 way differential multi purpose (flow control, differential pressure sustaining)                |
| 68-710 | 2-way pressure sustaining pilot valve                                                            |



### High Sensitivity Metal Pilots

For valve sizes 40mm to 600mm -  $1\frac{1}{2}$ " to 24"

Pressure rating: 25 bar / 360 psi

|        |                                                                                                                                     |
|--------|-------------------------------------------------------------------------------------------------------------------------------------|
| 70-110 | 3 way differential multi purpose (flow control, altitude control and differential pressure sustaining) with adjustable differential |
| 70-410 | 2-way differential pressure reducing mini pilot valve (flow control and altitude control)                                           |
| 31-10H | 3-way pressure reducing and differential control                                                                                    |




### Float Pilots

For valve sizes 40mm to 600mm -  $1\frac{1}{2}$ " to 24"

Pressure rating: 25 bar / 360 psi

|        |                                                                                             |
|--------|---------------------------------------------------------------------------------------------|
| 70-200 | Electric float                                                                              |
| 70-550 | Vertical, differential, 3 and 4-way metal float pilot                                       |
| 70-300 | Modulating, 2-way plastic float pilot for irrigation use (pressure rating: 8 bar / 115 psi) |
| 70-400 | Modulating, 2-way metal float pilot                                                         |
| 70-610 | Horizontal, differential, 3-way metal float pilot                                           |

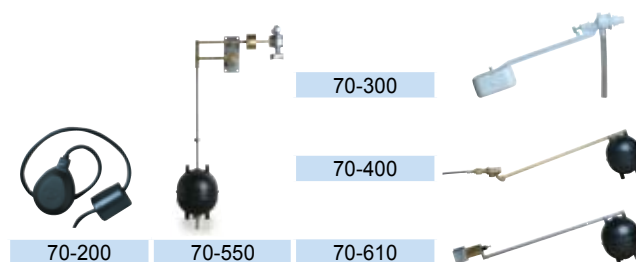

## Plastic Relays

For valve sizes 20mm to 150mm -  $\frac{3}{4}$ " to 6"

Pressure rating: 10 bar / 145 psi

|         |                                                                 |
|---------|-----------------------------------------------------------------|
| 25-300  | 3-way / 2 positions NO w. $\frac{3}{8}$ " ports hydraulic relay |
| 'Galit' | 3-way / 2 positions NC or NO, small hydraulic relay             |



25-300



'Galit'

## Metal Relays

For valve sizes 40mm to 600mm -  $1\frac{1}{2}$ " to 24"

Pressure rating: 25 bar / 360 psi

|        |                                                     |
|--------|-----------------------------------------------------|
| 66-210 | 3-way / 2 positions NO (66-213: NC) hydraulic relay |
| 66-300 | 3-way adjustable hydraulic relay                    |
| 28-200 | 2-way / 2 positions hydraulic relay                 |
| 28-300 | 3-way / 2 positions hydraulic relay                 |



66-210



66-310



28-200



28-300

## Mini Solenoids

For irrigation valve sizes 20mm to 150mm -  $\frac{3}{4}$ " to 6"

Pressure rating: 10 bar / 145 psi

Operating Voltage:

AC: 24V

DC: 12V or 24V

Latch 7.5-30V

|    |                               |
|----|-------------------------------|
| D2 | 2-way NC solenoid valve       |
| D3 | 3-way NC or NO solenoid valve |



D2



D3

## Heavy-duty Solenoids

For valve sizes 20mm to 600mm -  $\frac{3}{4}$ " to 24"

Pressure rating: According to the selected orifice and solenoid type

Operating Voltage (others available upon request):

AC: 24V, 110V or 220V

DC: 12V or 24V

Latch 9V, 12V, 24V

|    |                               |
|----|-------------------------------|
| B2 | 2-way NC or NO solenoid valve |
| B3 | 3-way NC or NO solenoid valve |



B2



B3

## Control Filters

**Self-Flushing, Inline** - Stainless steel screen filter, located within the main valve, and rinsed continuously by the stream

Sizes:  $\frac{1}{4}$ ",  $\frac{1}{2}$ "

**External, "Y" type** - Stainless steel screen installed in a "Y" shaped body on the pressure source.

Sizes:  $\frac{3}{8}$ ",  $\frac{1}{2}$ "

**External, large** - A large volume external filter



"Y" Filter



Self-Flushing Filter

### Automatic Control Valves



**Series 300** - Disc seal, Globe type valve. Very accurate regulations at near zero flow conditions. Minimum head-loss while fully open. Available in sizes: 1.5" (40mm) - 32" (800mm).



**Glass Reinforced Nylon Valves** - Diaphragm sealing valves made of reinforced Polyamide used in Greenhouses, Field Crops, Irrigation, Landscaping, Water Treatment (non corrosive). Available in sizes: 3/4" (20mm) - 3" (80mm).



**Series 500** - Disc seal, Y type valve. This valve is compact, partially made of new composite materials. Wide range of flow and pressure regulation. Available in sizes: 1.5" (40mm) - 8" (200mm).



**Back Flushing Valves** - Specially designed valves for back flow flushing of filtration systems. Available in Cast Iron or Glass Reinforced Nylon, Single or Double chamber operation. Available in sizes: 2" (50mm) - 4" (100mm).



**uPVC Valves** - Diaphragm sealing valves made of uPVC. For use with aggressive water and with underground (PVC) piping. Available in sizes: 3" (80mm) - 6" (150mm).

### Manual Valves



**Butterfly Valves** - Soft sealing valves (Wafer type) with options of gear, lever (or other) operation. Available in sizes: 2" (50mm) - 24" (600mm).



**Non Return Valves** - Swing check valves, tilting disc check valves, double flap check valves.



**Gate Valves** - Valves with soft and resilient or rigid sealing.

### Air Release Valves



**Non Metal Air Release Valves** - Kinetic, Automatic and Combination Air Release Valves made of Polypropylene materials. Available in sizes: 1/2" (12mm) - 2" (50mm).



**Ductile Iron Air Release Valves** - Kinetic, Combination and Sewage Air Release Valves made of ductile iron. Option for surge arrestor feature. Available in sizes: 2" (50mm) - 12" (300mm).

### Water Meters



**Water Meters** - Multi-Jet, Single-Jet, Irrigation Meters (pelton wheel type), Woltman Meters and Volumetric Meters. Available in sizes: 1/2" (15mm) - 24" (600mm).

Series 100 Valves  
Typical Applications

Control applications

in water supply

Sewage



irrigation  
systems

industrial



A Miya  
Group company

## DOROT AUTOMATIC CONTROL VALVES

Founded in 1946, DOROT is a leading developer, manufacturer and marketer of a wide range of superior quality automatic control valves. DOROT's experienced Research & Development Dept. has a long tradition of generating innovative solutions for the application of water control systems. These include, waterworks distribution networks, sewage and effluent disposal, fire protection, mining and irrigation systems.

DOROT's commitment to excellence begins with using the highest quality materials. The company's engineering experts are constantly working to provide customers with a broad range of valve patterns and sizes in a wide variety of metals and grades including: Cast Iron, Ductile Iron, Cast Steel, SST, Bronze, Marine Bronze, Polyamide and P.V.C.

The experts at DOROT custom-design each valve application according to specific control requirements. Most of the production process, which includes machining and coating, takes place in modern in-house facilities. Before leaving the factory, each product is hydraulically tested. An advanced testing laboratory simulates the anticipated field conditions.

With distribution in more than 70 countries world-wide, a key component of the DOROT difference is its outstanding customer service. This includes field assistance, technical advice, training programs and follow-up consultations.

It is all of these factors that make DOROT a leader in fluid control technology and customer satisfaction.

